

Technical Data Manual

for use by heating contractor

VIESSMANN®

Vitocal 100-AW AM2V

Models 020028, 0340043 and 051078



Outdoor Air to Water Heat Pump

Indoor Distribution and Control Unit

Heating Capacity: 20.5 to 58 MBH
6 to 17 kW

Cooling Capacity: 1.4 to 4.3 Ton
5 to 15 kW

VITOCAL 100-AW



Product may not be exactly as shown

IMPORTANT

Read and save these instructions for future reference.

Product Information

The Vitocal 100-AW AM2V heat pump is designed for heating/cooling of a building and heating domestic hot water. The unit consists of two modules:

Outdoor Unit

The working principle of the unit is to capture heat from the environment and to transfer it to the heating circuit in the building. The low-temperature heat of the air is transferred through an evaporator to the heat pump system filled with a refrigerant, which turns into a gas as it evaporates. From the evaporator, the gas is drawn in by the compressor, which raises its temperature during its compression and directs it to the condenser. In the condenser, heat is transferred to the refrigerant, which fills the central heating system, and the cooled liquid flows through the expansion valve and returns to the evaporator, after which the whole process starts again. In the case of cooling, this cycle is reversed and the heat is extracted from the building and discharged outside.

Refrigeration circuit

All the components of the refrigeration circuit are located in the outdoor module, including the refrigeration circuit controller with an electronic expansion valve. Depending on the operating conditions, the compressor power is adjusted by means of an inverter. When the space cooling function is activated, the refrigeration circuit is reversed.

Plumbing system

The indoor and outdoor modules are connected to each other via heating medium hydronic lines. A high-efficiency circulation pump (secondary pump) built into the indoor module supplies the heating medium to the secondary circuit. A central 3-way diverter valve: "heating/DHW heating" is responsible for switching between space heating and hot tap water heating.

Heat pump controller

The entire heating system is monitored and controlled by the heat pump controller. The heat pump controller is integrated into the indoor module. Communication between the indoor and outdoor modules takes place via a communication bus.

Indoor Unit

The working principle of the unit is based on the demand-dependent capacity control of the heat pump compressor with an activation of the electrical auxiliary heater via the controller of the indoor module. The indoor module controller regulates the heating output according to a pre-set heating curve. If the heat pump is not able to cover the building's heating demand on its own, the controller automatically activates the electrical auxiliary heater which, together with the heat pump produces the desired heating medium temperature.

Outdoor temperature ranges for air-to-water heat pumps

Air-to-water heat pumps use the outdoor air as the heat source. Operation is only efficient within certain outdoor temperature ranges, e.g. between -13°F and 113°F (-25°C and $+43^{\circ}\text{C}$). If the upper temperature limit is exceeded or the lower temperature limit has been reached, heat pumps switch off periodically. A corresponding notification appears on the heat pump controller. To cover the heat demand for space heating and tap water heating beyond the temperature limits, the heat pump controller automatically switches on the available auxiliary heating equipment, e.g. electric auxiliary heating, if necessary.

Required equipment

A communication bus cable between the outdoor module and the indoor module.

Recommended: LiYY 2 X 22 AWG (0.34mm²)

Maximum: LiYY 2 X 18 AWG (1.5mm²)

Installation with heating/cooling buffer storage tank

■ Space heating

The heat pump may heat up to 2 heating/cooling circuits: 1 heating/cooling circuit without a mixer and 1 heating/cooling circuit with a mixer.

■ Space cooling

The heat pump may cool via up to 2 heating/cooling circuits.

Applicability

CAUTION

The serial number must be provided when ordering replacement parts. Some replacement parts are not reverse compatible with previous versions of the Vitocal 100-AW AM2V.

IMPORTANT

When ordering replacement parts, provide either the 16-digit serial number which is found on either the indoor unit rating plate or outdoor unit rating plate.

Indoor Unit:

Model No.	Serial No.
AM2V 020028	7228973 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
AM2V 034043	7228974 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
AM2V 051078	7228975 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>

Outdoor Unit:

Model No.	Serial No.
AM2V 020028	7986309 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
AM2V 034043	7986310 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
AM2V 051078	7986311 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>

Certifications

Indoor Unit



Outdoor Unit




Intertek



Product may not be exactly as shown

- 1** Integrated resistive heating element
- 2** Integrated Space Heating/DHW Production diverting valve
- 3** Integrated system pump
- 4** Integrated system expansion tank
- 5** Monochrome digit interface

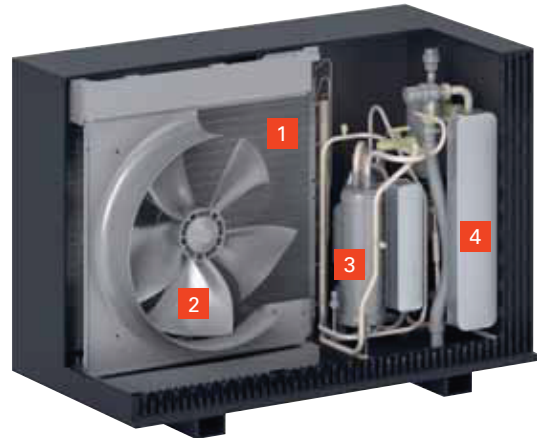

Product may not be exactly as shown

- 1** Coil
- 2** Fan
- 3** Compressor
- 4** Brazed plate heat exchanger

Indoor Unit Technical Data


Indoor Unit	Model	AM2V 020028	AM2V 034043	AM2V 051078	
Electrical Data					
Power Supply	Voltage	230 VAC	230 VAC	230 VAC	
	Phase	1	1	1	
	Hertz	60	60	60	
	Amperage (FLA)	31	31	43	
	Maximum Fuse (Amps)	40	40	50	
Electric Heater Output	kW (BTU)	6 (20500)	6 (20500)	9 (30700)	
Heating Elements		2	2	3	
Hydronic Data					
Hydronic connection		1¼ NPT (Male Threads)	1¼ NPT (Male Threads)	1¼ NPT (Male Threads)	
Min. Operating Pressure	PSI (bar)	8 (0.5)	8 (0.5)	8 (0.5)	
Max. Operating Pressure	PSI (bar)	30 (2)	30 (2)	30 (2)	
Max. System Temperature	°F (°C)	140 (60)	140 (60)	140 (60)	
Max. DHW Temperature	°F (°C)	167 (75)	167 (75)	167 (75)	
Max. Operating Temperature	°F (°C)	165 (74)	165 (74)	165 (74)	
Fixed High Limit	°F (°C)	186 (86)	186 (86)	186 (86)	
Expansion vessel volume	USG (l)	3.2 (12)	3.2 (12)	3.2 (12)	
Expansion vessel precharge	PSI (bar)	14 (1)	14 (1)	14 (1)	
Minimum flow	GPM (m³/h)	2.6 (0.6)	3.1 (0.7)	3.7 (0.85)	
Maximum flow	GPM (m³/h)	4.4 (1.0)	7.5 (1.7)	12.8 (2.9)	
Pressure drop	ft. of hd (kPa)	0.6 (2)	1.6 (5)	5.0 (15)	
Minimum Relief Valve Capacity	MBH	510	510	510	
Dimensional Data					
Dimensions	Height	in. (mm)	28-½ (723)	28-½ (723)	28-½ (723)
	Width	in. (mm)	16-¼ (416)	16-¼ (416)	16-¼ (416)
	Depth	in. (mm)	12-¾ (323)	12-¾ (323)	12-¾ (323)
Weight		lbs (kg)	64 (29)	64 (29)	64 (29)

Outdoor Unit Technical Data


Outdoor Unit		Model	AM2V 020028	AM2V 034043	AM2V 051078
Heating/Cooling Data					
Heating Capacity		MBH (kW)	20.5 (6.0)	34.0 (10)	58.0 (17)
COP (A5W110)			1.3	2.2	1.9
Cooling Capacity Range	Low	Tons (kW)	1.4 (5.0)	2.8 (9.8)	4.2 (14.7)
	High	Tons (kW)	1.5 (5.2)	3.0 (10.5)	4.3 (15.1)
Energy Efficiency Ratio (EER)			16.81	16.75	14.46
COP			4.927	4.909	4.238
Electrical Data					
Power Supply		Voltage	208/230 VAC	208/230 VAC	208/230 VAC
		Phase	1	1	1
		Hertz	60	60	60
Total Electrical Load		Amps	13.0	21.8	35.1
Compressor Load Rating		Amps	12.2	21.0	33.5
Fan Motor Load Rating		Amps	0.8	0.8	2 x 0.8
Minimum Circuit Ampacity		Amps	17	28	44
Maximum Fuse		Amps	25	45	70
Refrigerant					
Refrigerant			R32	R32	R32
Factory Charge		lbs (kg)	2.43 (1.1)	3.97 (1.8)	4.41 (2.0)
Max. Allowable Pressure - Heating		PSIG (MPa)	725 (5.0)	740 (5.1)	972 (6.7)
Max. Allowable Pressure - Cooling		PSIG (MPa)	624 (4.3)	609 (4.2)	624 (4.3)
Max. Operating Pressure - Low Side		PSIG (MPa)	305 (2.1)	305 (2.1)	305 (2.1)
Max. Operating Pressure - High Side		PSIG (MPa)	638 (4.4)	638 (4.4)	638 (4.4)
Hydronic Data					
Hydronic connection			1 NPT (Male Threads)	1 NPT (Male Threads)	1 NPT (Male Threads)
Water Flow Rate		GPM (m ³ /h)	3.7-8.8 (0.85-2.0)	6.2-15.0 (1.4-3.4)	11.4-25.5 (2.6-5.8)
Pressure drop		ft. of hd (kPa)	3.3 (10)	6.7 (20)	15.0 (45)
Maximum temperature of heating medium		°F(°C)	149 (65)	149 (65)	149 (65)
Air and Noise					
Maximum DC power of fan		W	85	170	2 x 75
Maximum air flow		CFM (m ³ /h)	1765 (3000)	2650 (4500)	2 x 1470 (2 x 2500)
Minimum/maximum air temperature		°F(°C)	-13/109 (-25/43)	-13/109 (-25/43)	-13/109 (-25/43)
Maximum sound pressure level at 3.3 ft. (1m) distance		dB(A)	52	55	56
Maximum sound power level		dB(A)	60	63	64
Dimensional Data					
Dimensions (HXWxD)	Height	in. (mm)	31- ¹ / ₄ (795)	36- ¹ / ₂ (928)	52- ³ / ₈ (1329)
	Width	in. (mm)	46 (1165)	50- ³ / ₄ (1285)	49- ¹ / ₄ (1250)
	Depth	in. (mm)	15- ³ / ₄ (400)	18- ¹ / ₈ (460)	19- ¹ / ₂ (495)
Weight		lbs (kg)	198 (90)	291 (132)	353 (160)

Heating Performance AM2V 020028


Heating Capacity

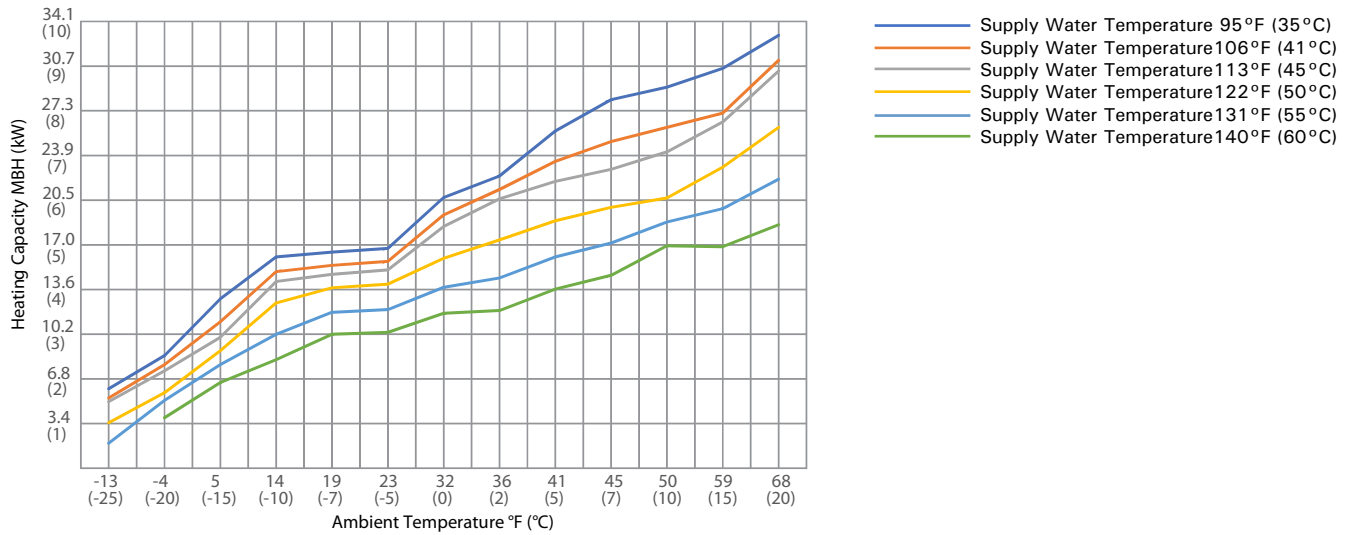

Electrical Power Consumption

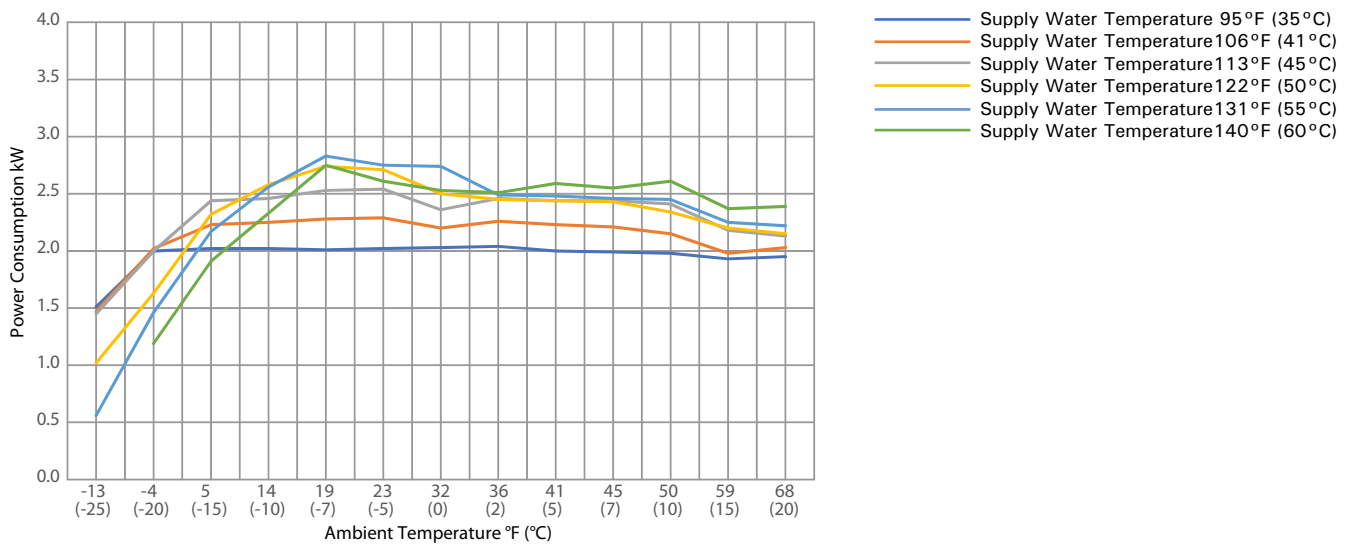


Coefficient of Performance

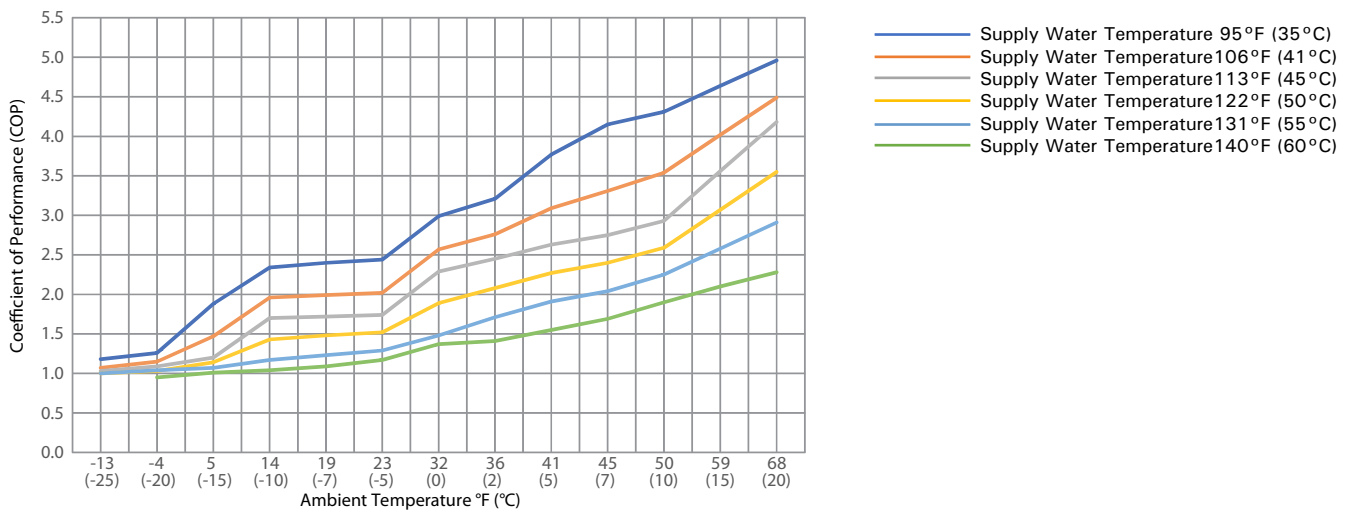


Heating Performance AM2V 034043

Heating Capacity

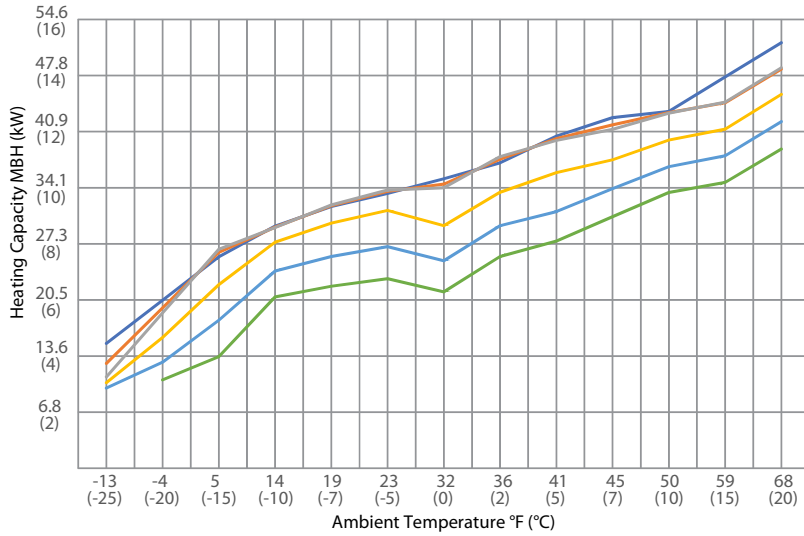


- Supply Water Temperature 95°F (35°C)
- Supply Water Temperature 106°F (41°C)
- Supply Water Temperature 113°F (45°C)
- Supply Water Temperature 122°F (50°C)
- Supply Water Temperature 131°F (55°C)
- Supply Water Temperature 140°F (60°C)

Electrical Power Consumption

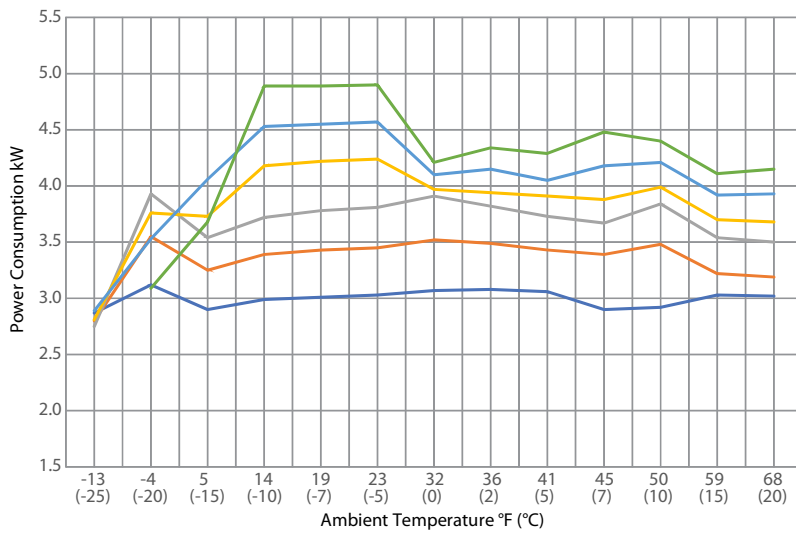

- Supply Water Temperature 95°F (35°C)
- Supply Water Temperature 106°F (41°C)
- Supply Water Temperature 113°F (45°C)
- Supply Water Temperature 122°F (50°C)
- Supply Water Temperature 131°F (55°C)
- Supply Water Temperature 140°F (60°C)


Coefficient of Performance

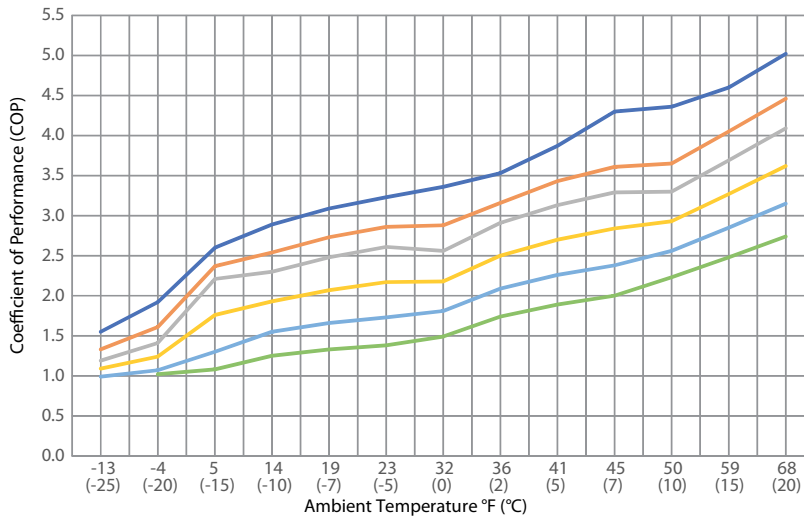


- Supply Water Temperature 95°F (35°C)
- Supply Water Temperature 106°F (41°C)
- Supply Water Temperature 113°F (45°C)
- Supply Water Temperature 122°F (50°C)
- Supply Water Temperature 131°F (55°C)
- Supply Water Temperature 140°F (60°C)

Heating Performance AM2V 051078


Heating Capacity

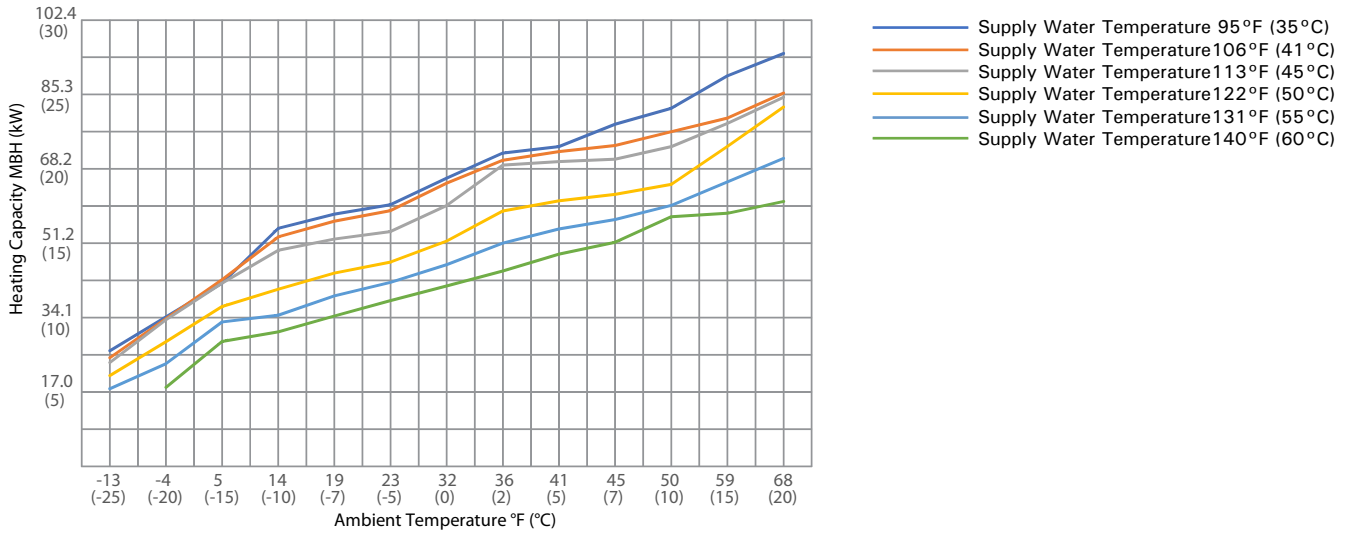

Electrical Power Consumption

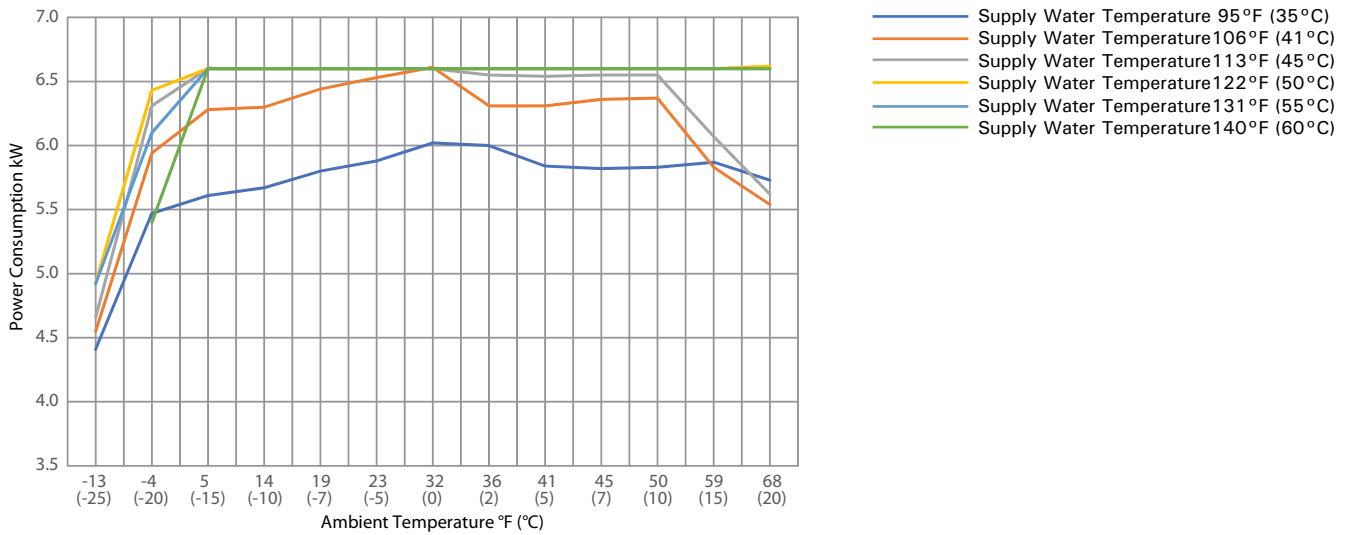


Coefficient of Performance

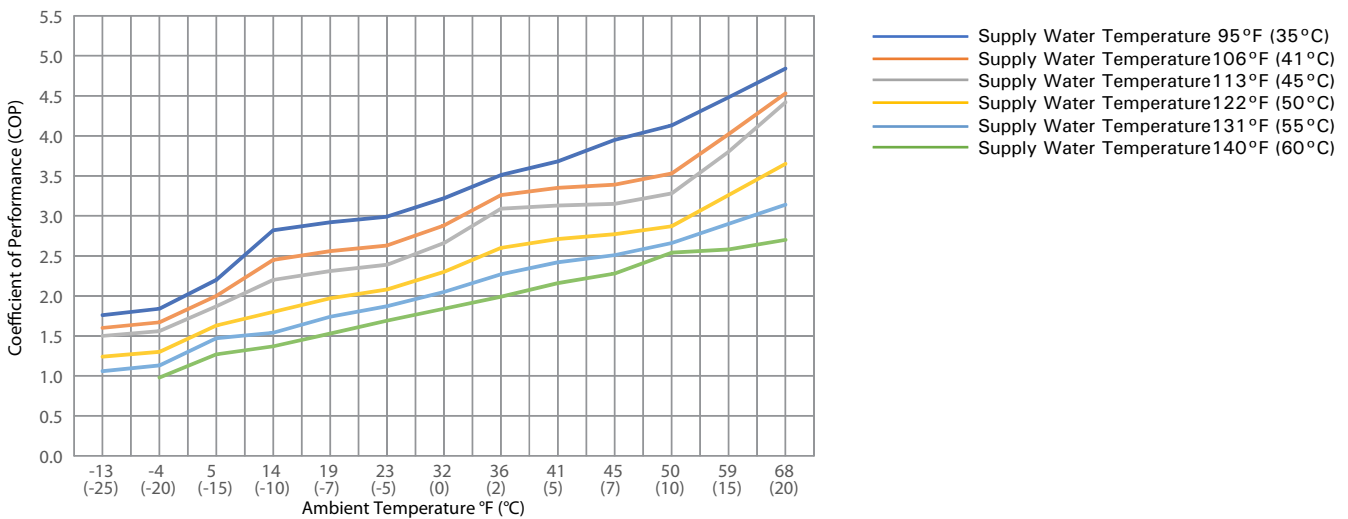


Cooling Performance AM2V 020028

Cooling Capacity/Electrical Power Consumption

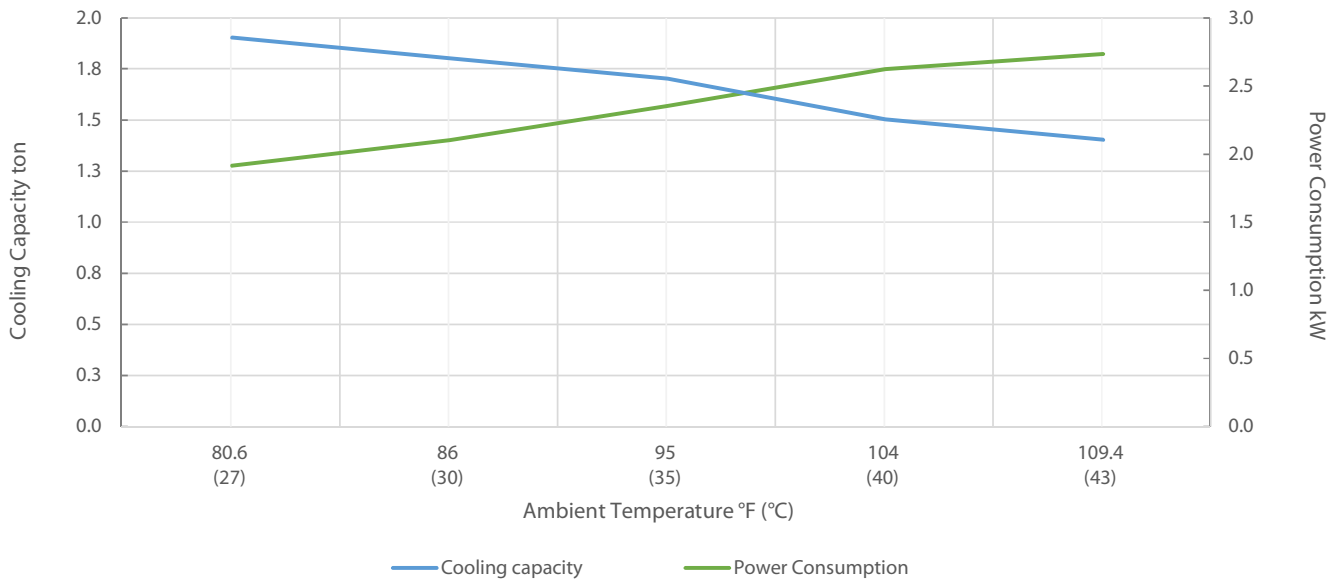

Based on a supply water temperature of 45°F (7°C)

Coefficient of Performance

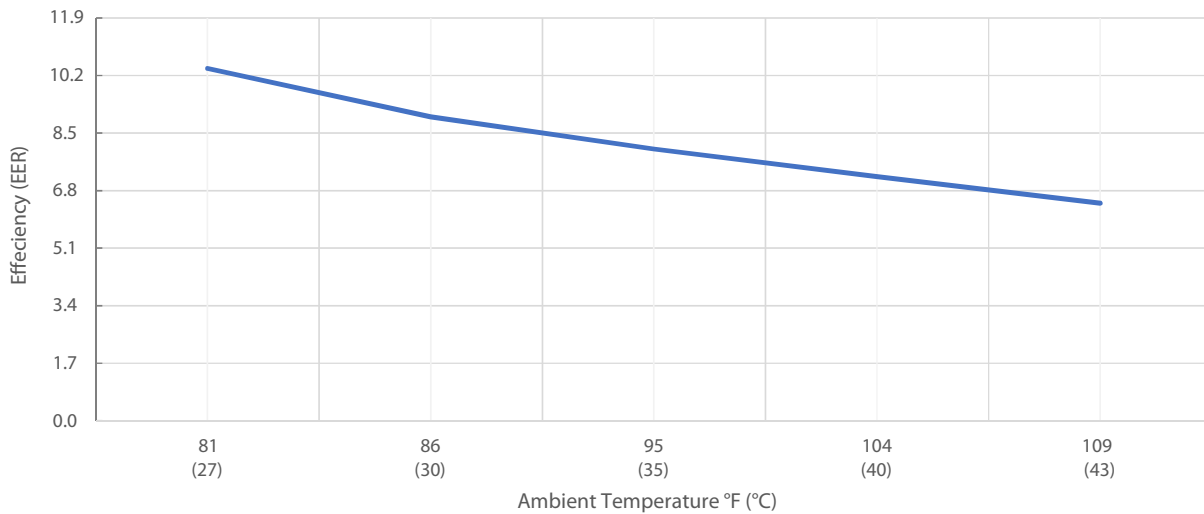


Based on a supply water temperature of 45°F (7°C)

Performance with Evaporator Leaving Water Temperature 45 °F (7°C)

Condenser Entering Air Dry Bulb	°F(°C)	95(35)	80(27)	65(19)	55(13)
	Load %	100	75	50	25
Capacity	(kW)	5.00	3.75	2.50	1.25
Total Power	(kW)	1.90	0.88	0.45	0.22
Efficiency	EER	9.00	13.51	18.80	19.89
IPLV		4.867			


Cooling Performance AM2V 034043

Cooling Capacity/Electrical Power Consumption

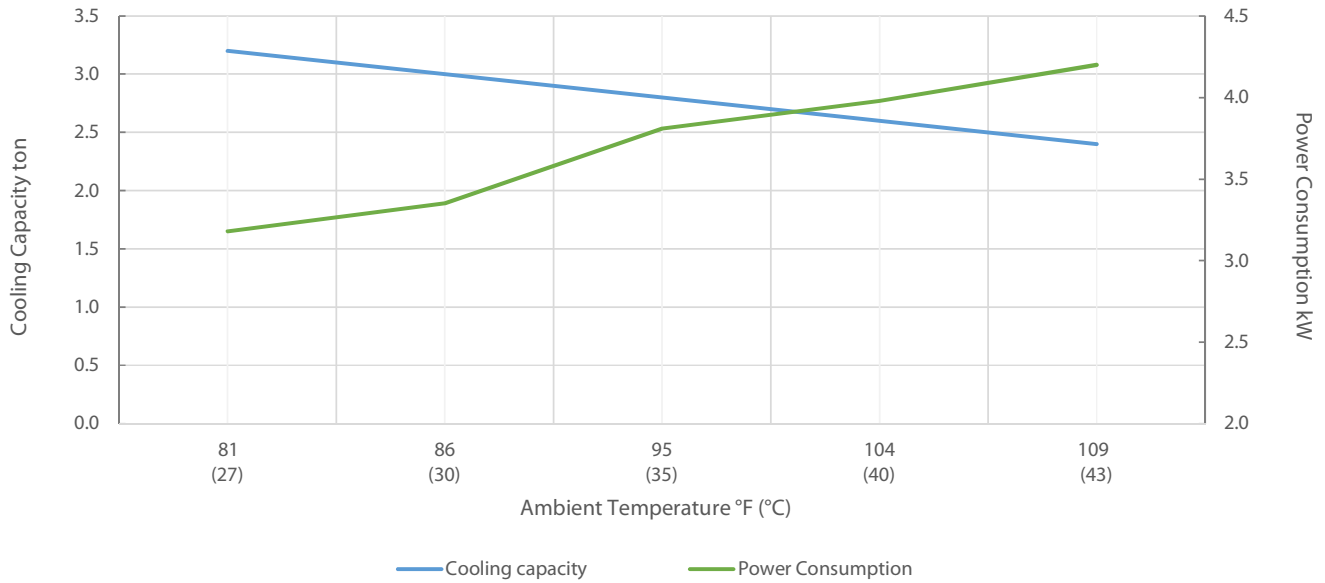

Based on a supply water temperature of 45°F (7°C)

Coefficient of Performance

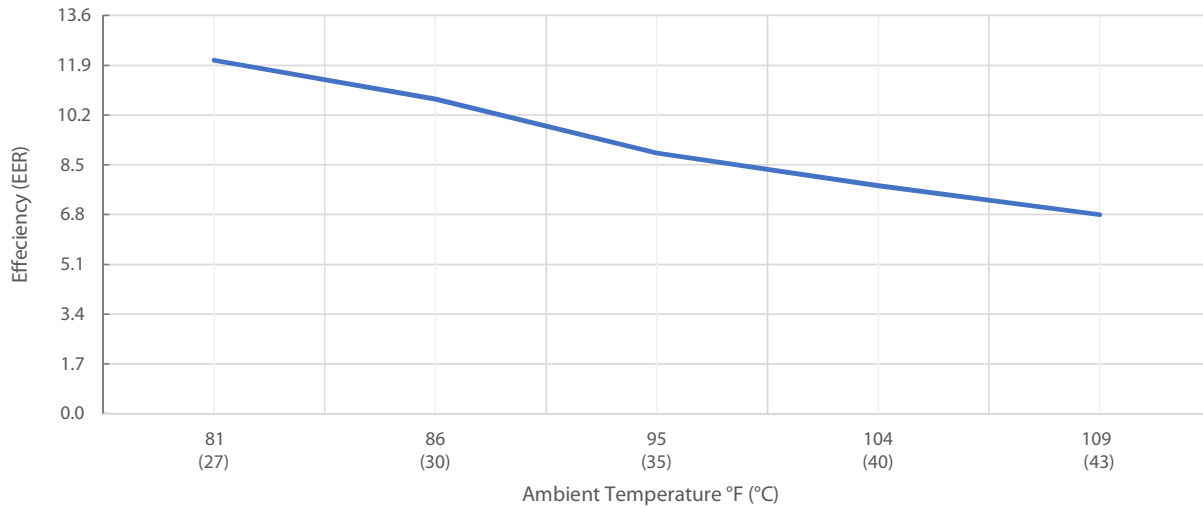


Based on a supply water temperature of 45°F (7°C)

Performance with Evaporator Leaving Water Temperature 45 °F (7°C)

Condenser Entering Air Dry Bulb	°F(°C)	95(35)	80(27)	65(19)	55(13)
	Load %	100	75	50	25
Capacity	(kW)	10.0	7.5	5.0	2.5
Total Power	(kW)	3.81	1.88	0.88	0.45
Efficiency	EER	8.93	13.57	19.41	19.89
IPLV		4.957			


Cooling Performance AM2V 051078

Cooling Capacity/Electrical Power Consumption

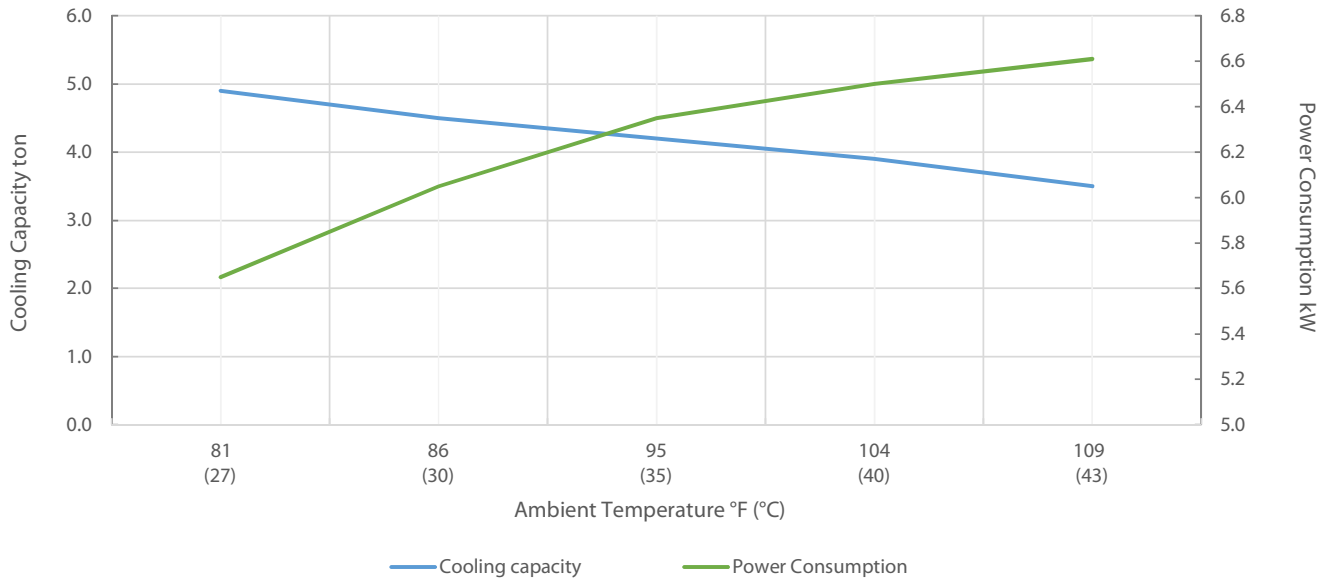

Based on a supply water temperature of 45°F (7°C)

Coefficient of Performance


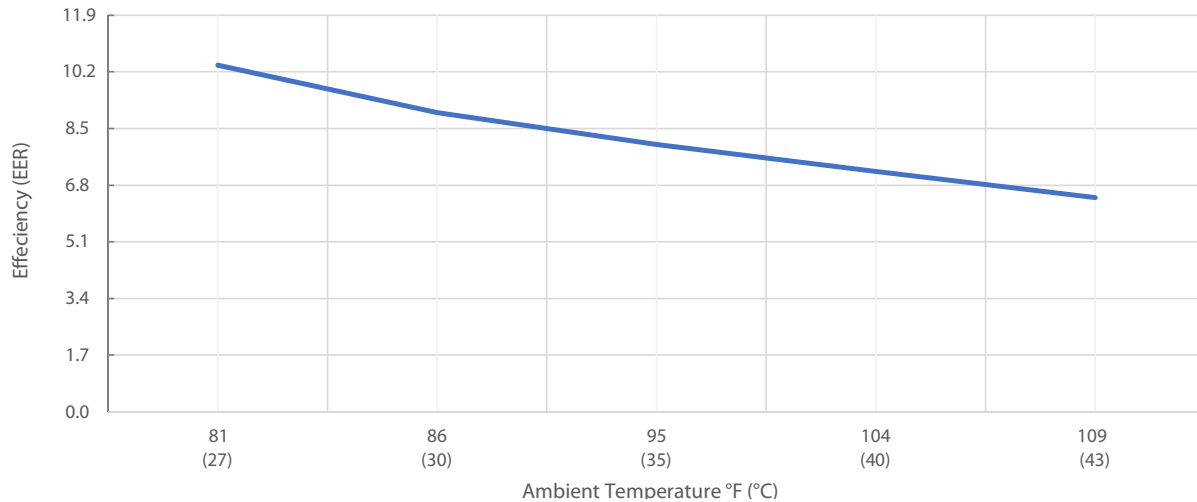


Based on a supply water temperature of 45°F (7°C)

Performance with Evaporator Leaving Water Temperature 45 °F (7°C)

Condenser Entering Air Dry Bulb	°F(°C)	95(35)	80(27)	65(19)	55(13)
Load %		100	75	50	25
Capacity	(kW)	15.00	11.25	7.50	3.75
Total Power	(kW)	6.44	3.51	1.62	0.71
Efficiency	EER	7.84	10.95	15.76	21.56
IPLV		4.208			

Dimensions

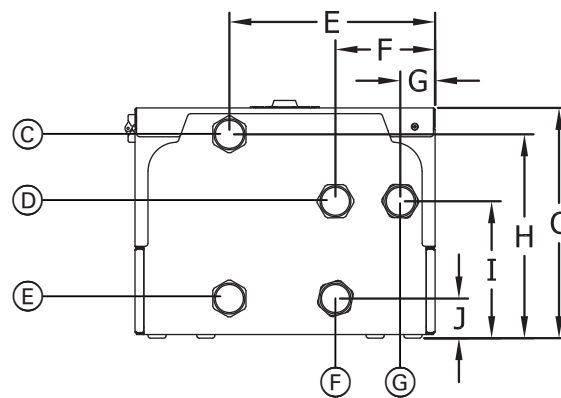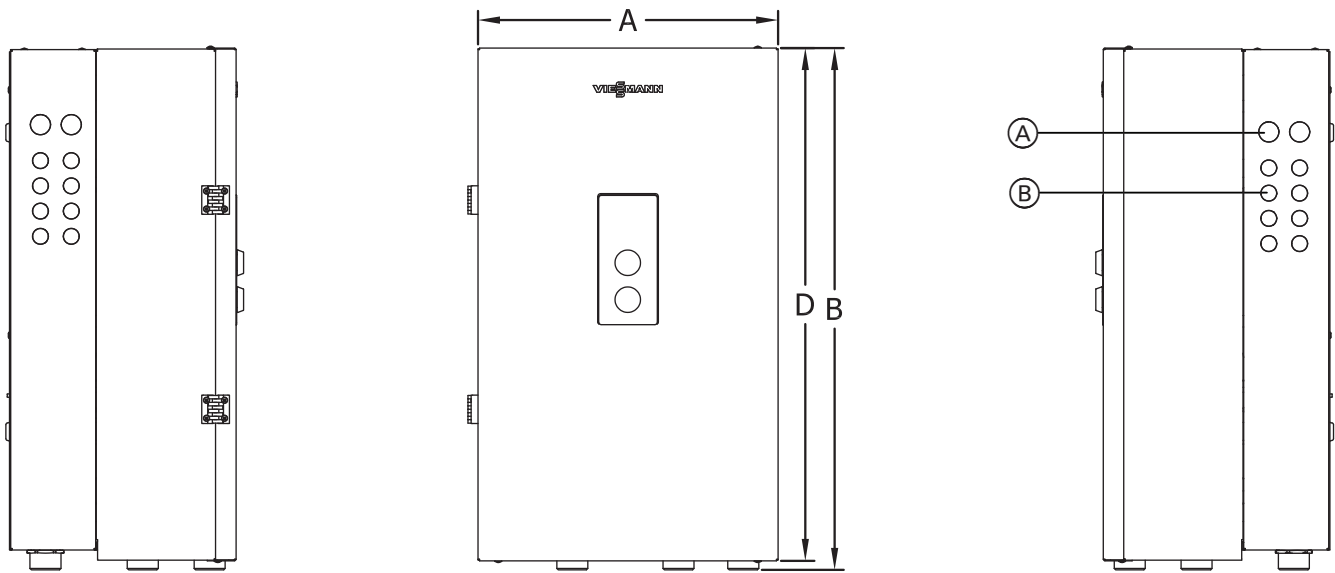


Dimensions in. (mm)

A	16-1/4 (416)	F	5-1/2 (138)
B	28-1/2 (723)	G	2 (48)
C	12-3/4 (323)	H	11-1/4 (283)
D	28-1/4 (717)	I	7-1/2 (190)
E	11-1/4 (285)	J	2-1/4 (55)

Legend

- (A) 3/4 in. Electrical Knockouts (2 per side)
- (B) 1/2 in. Electrical Knockouts (8 per side)
- (C) Return to Heat Pump (1-1/4 in. NPT)
- (D) Supply to Space Heating (1-1/4 in. NPT)
- (E) DHW/Space Heating Return (1-1/4 in. NPT)
- (F) Supply from Heat Pump (1-1/4 in. NPT)
- (G) DHW Tank Heating Supply (1-1/4 in. NPT)

Recommended Minimum Service Clearances

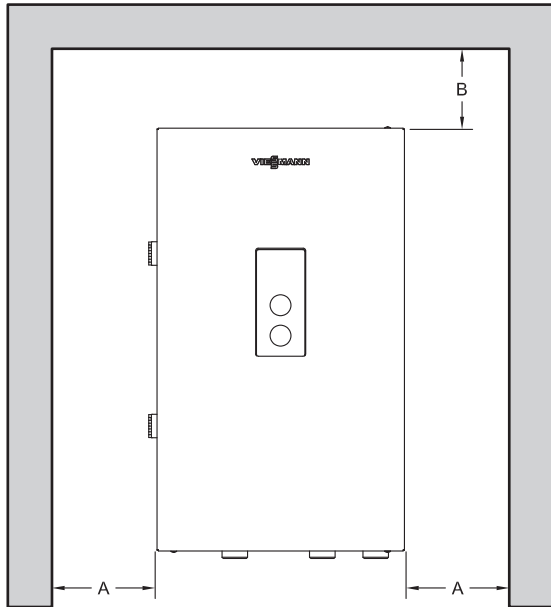

Recommended minimum service clearances

For typical installation, it is recommended to install the indoor unit with the clearances shown in the illustration.

- A - 12 in. (300 mm)
- B - 20 in. (500 mm)
- Front Clearance 39 in. (1000 mm)


These dimensions reflect the recommended service clearance for the indoor unit only, ensure adequate clearance is left for the installation of piping and electrical connections.

Minimum Clearances to Combustibles

Top	Front	Rear	Left	Right
0	0 AL, CL	0	0	0

AL = Alcove
CL = Closet

Mounting the Indoor Unit

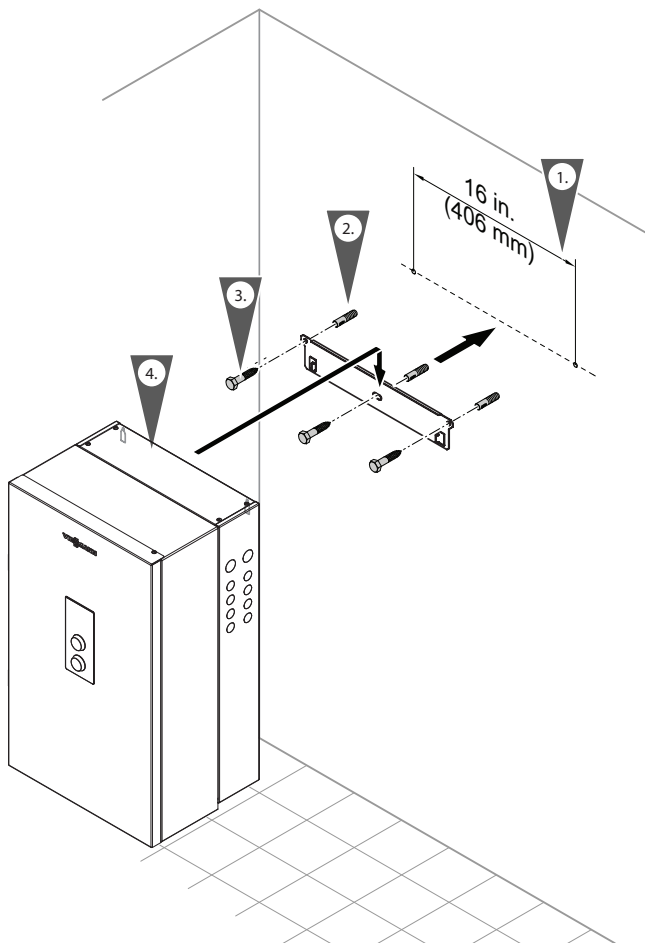

Installing the wall mounting bracket

The indoor unit can be wall-mounted on a concrete wall. Note: The enclosed screws and rawl plugs are only suitable for concrete. For other construction materials, use bolts and anchors that are suitable for 100 lb. (46 kg) loads.

Installation of mounting bracket on brick/concrete wall


1. Mark out the rawl plug holes.
2. Drill holes $\varnothing \frac{3}{8}$ in. ($\varnothing 10$ mm) and insert the rawl plugs supplied.
3. Fit the wall mounting bracket with the screws supplied.
4. Mount the indoor unit on the wall mounting bracket. Ensure that both tabs have locked into the indoor unit.

Note: Check the condition of the wall where the indoor unit is to be installed. For the suitability of the supplied rawl plugs for various building materials, see the manufacturer's instructions. For other construction materials, use fixing materials with sufficient load bearing capacity.

CAUTION

Whichever mounting method is used, ensure that the bracket is tightly and securely fastened to wall. Failure to secure indoor unit properly could cause indoor unit to loosen, posing a severe safety hazard.

Piping Connections

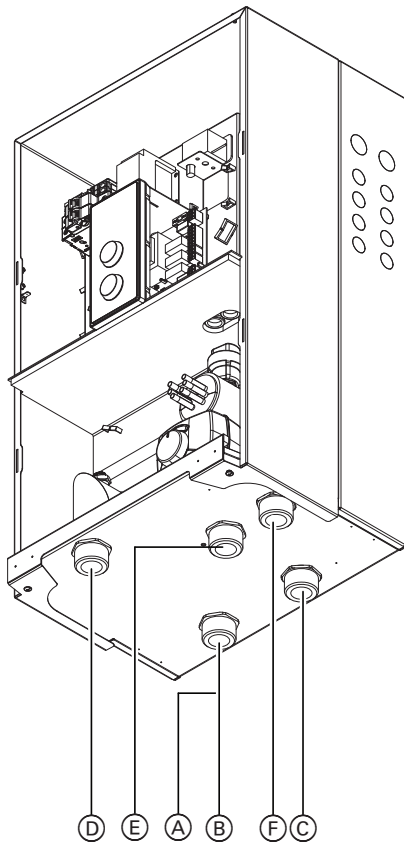

Legend

- (A) DHW tank heating return
- (B) Heating system return
- (C) Supply from the heat pump outdoor unit
- (D) Return to the heat pump outdoor unit
- (E) Heating system supply
- (F) DHW tank heating supply

Note: Install temperature gauge (field supplied) anywhere in the supply piping near the heat pump (not shown).

Proper piping practice

Support piping by proper suspension method. Piping must not rest on or be supported by indoor unit.

Connections on the heating water and DHW sides

If the connections have not been fitted previously, make the connections on the heating water and DHW sides.

Note: If no tank is connected, close off the DHW tank supply connection with a cap.

Heating water connections

1. Thoroughly flush heating system (particularly before connecting the heat pump to an existing system).
2. Connect indoor unit to the heating system.

Note: Use an approved pipe sealant or Teflon tape when connecting the installation fittings.

Maximum allowable working pressure (MAWP):
30 psig (2 bar)

WARNING

Exposing the heat pump to pressures and temperatures in excess of those listed will result in damages, and will render warranty null and void.

- Use a two-hand wrench method when tightening fittings or piping onto the connectors. Use one wrench to prevent the pipes from twisting and the second wrench to tighten the fitting or piping. Failure to support the connection could damage the heat pump and its internal piping.
- All plumbing must meet or exceed all local state and national plumbing codes.

SUPPORT ALL PIPING USING HANGERS. DO NOT support piping by the indoor unit or its components.


- Use isolation valves to isolate system components.

General

A distance of 2 in. (50 mm) from uninsulated hot water pipes to combustible components must be maintained.

If the pipes are provided with a suitable pipe insulation of sufficient thickness and insulation, the distance mentioned above is not necessary (see also local regulations).

Safety Valve

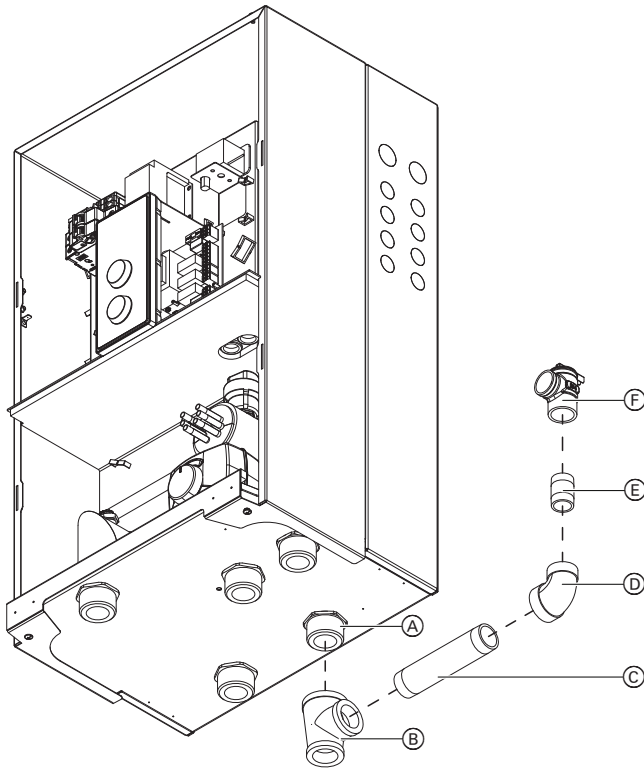

Legend

- (A) Supply from Outdoor Unit
- (B) 1-1/4 X 1 X 1 Inch Brass Reducing Tee
- (C) 1 X 6 Inch Long Brass Nipple
- (D) 1 X 3/4 Inch Brass Reducing Elbow
- (E) 3/4 Inch Brass Close Nipple
- (F) 30 PSI Pressure Relief Valve

Installing the pressure relief valve:

1. Use the supplied fittings to install the pressure relief valve on the Supply from Outdoor Unit Connection of the Indoor Unit.

Minimum connection diameters:

- Pressure relief valve..... 3/4 in.
- Discharge pipe 3/4 in.
- Maximum operating pressure: 30 PSI (2 bar)
- Minimum operating pressure: 8 PSI (0.5 bar)

Installing the discharge pipe:

1. Install discharge pipe on pressure relief valve in such a way that...
 - the end of the pipe is not threaded.
 - the pressure relief discharge pipe extends to a floor drain and ends approximately 6 in. (150 mm) above the drain.
- Ensure that...
- there is no shutoff valve installed in the discharge pipe.
 - discharge pipe diameter is not reduced.
 - discharge is not piped to outdoors.

! IMPORTANT

Install the (approved) factory supplied pressure relief valve. Removal of air from the system must occur via use of air vent(s) in the system supply. To ensure the heat pump can be purged of all air, ensure supply/return water lines do not contain restrictive piping where air could be trapped.


! WARNING

Do not install an isolation valve between heat pump and pressure relief valve. The discharge pipe for the pressure relief valve must be oriented to prevent scalding of attendants. Pipe pressure relief valve discharge pipe close to floor drain. Never pipe discharge pipe to the outdoors.

Installation Fittings

Installation Fittings



The indoor unit is supplied with the installation fittings described.

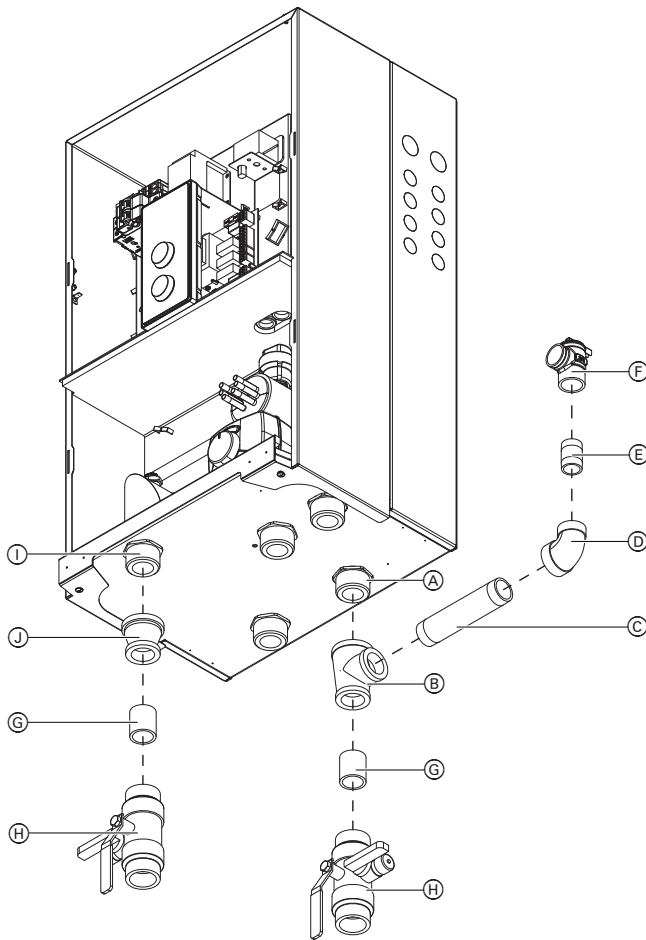

Legend

- (A) Supply from Outdoor Unit
- (B) 1-1/4 X 1 X 1 Inch Brass Reducing Tee
- (C) 1 X 6 Inch Long Brass Nipple
- (D) 1 X 3/4 Inch Brass Reducing Elbow
- (E) 3/4 Inch Brass Close Nipple
- (F) 30 PSI Pressure Relief Valve
- (G) 1 Inch Brass Close Nipple
- (H) Drain/Fill/Isolate Ball Valve
- (I) Return to Outdoor Unit
- (J) 1-1/4 X 1 Inch Brass Reducing Coupling

Domestic Hot Water

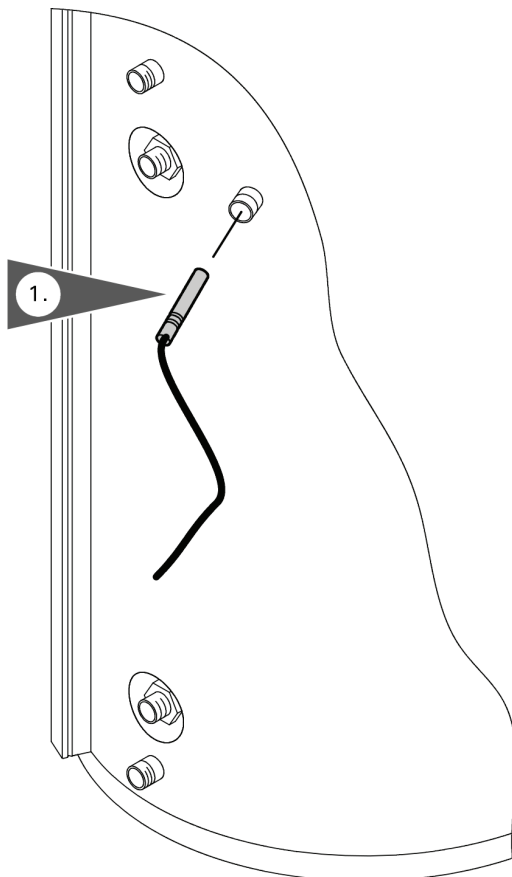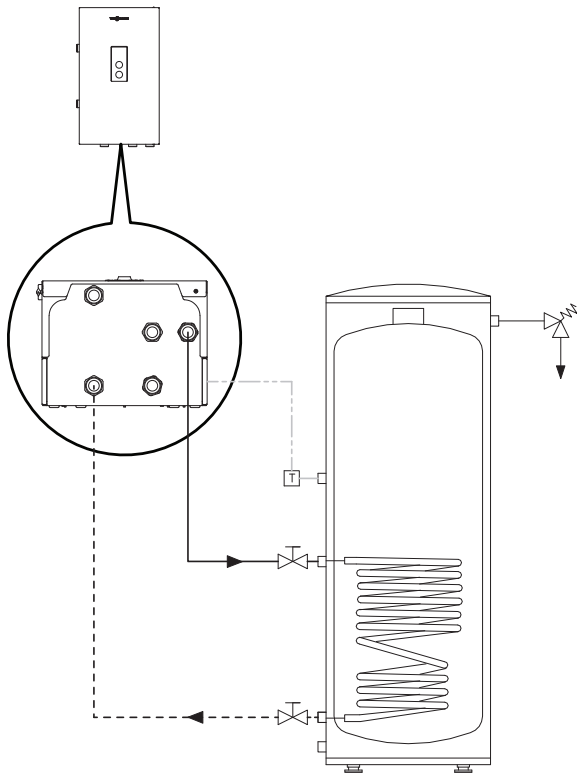

The Vitocal 100-AW AM2V series can be used in conjunction with the stand-alone DHW storage tanks offered by Viessmann.

For the connection of a stand-alone DHW tank, installation fittings (field supplied), and a DHW temperature sensor (supplied with heat pump) is required.

Size and select the DHW storage tank based on the forecasted DHW consumption of the building in question.

For further technical information on DHW storage tanks, see the Vitocell Technical Data Manuals.

DHW storage tank information

The DHW sensor is required when using a stand-alone DHW storage tank with the heat pump. The heat pump is supplied with a DHW sensor (all other fittings are field supplied).

Making the DHW connections





1. With a Vitocell tanks, locate the DHW temperature sensor well and install the DHW temperature sensor using the installation instructions provided with the DHW storage tanks.

! IMPORTANT
Follow the Installation Instructions supplied with the Viessmann DHW storage tank when mounting and securing DHW tank temperature sensor.

! WARNING
If a DHW storage tank other than a Viessmann Vitocell tank is used, the installer must verify proper operation of the Viessmann DHW tank temperature sensor with original manufacturer of the tank. Viessmann strongly recommends the installation of a temperature tempering valve in the DHW supply line.

Dimensions

AM2V 020028/034043 Outdoor Unit

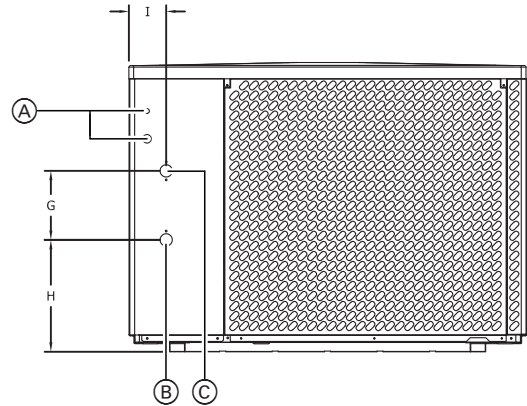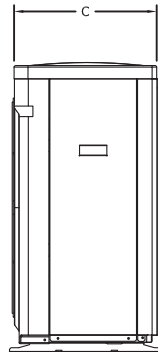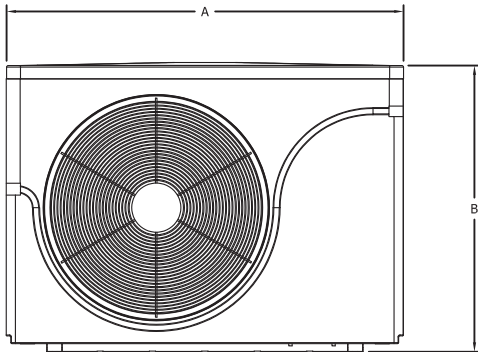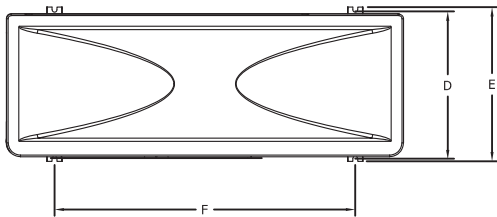

Dimensions in. (mm)





	AM2V 020028	AM2V 034043
A	46 (1165)	50-3/4 (1285)
B	31-1/4 (795)	36-1/2 (928)
C	15-3/4 (400)	18-1/8 (460)
D	17 (428)	18-1/2 (470)
E	17-3/4 (450)	20 (500)
F	32-5/8 (830)	38-3/8 (975)
G	9-1/8 (232)	8-5/8 (220)
H	13 (330)	14-1/8 (360)
I	6-1/2 (166)	4-5/8 (118)

Legend

- Ⓐ - Electrical Connections
- Ⓑ - Heat Pump Hydronic Supply (1 in. NPT Male)
- Ⓒ - Heat Pump Hydronic Return (1 in. NPT Male)

Dimensions

AM2V 051078 Outdoor Unit

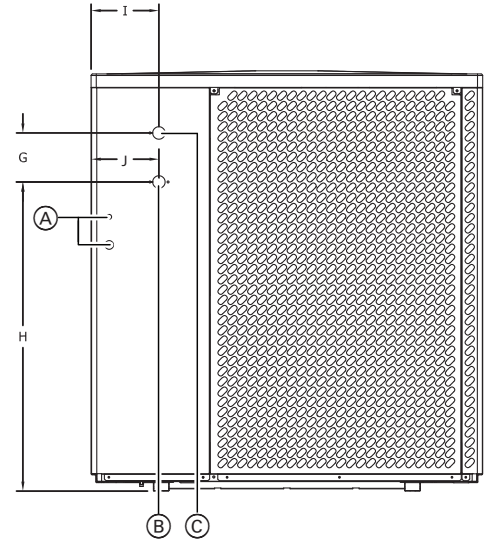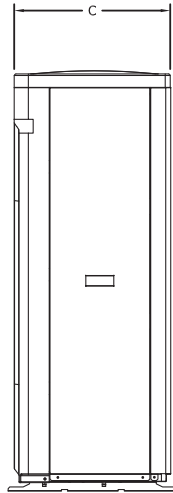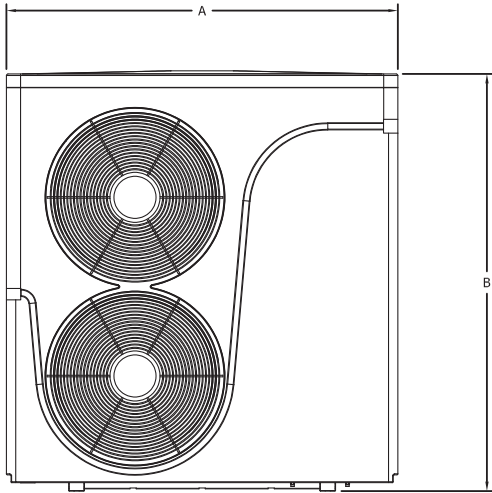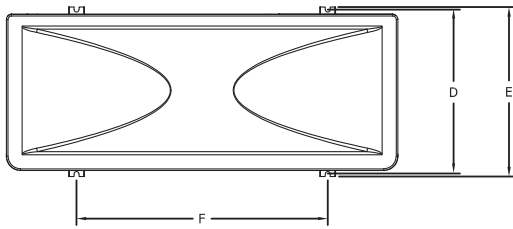

Dimensions in. (mm)


A	49- ¹ / ₄ (1250)	F	31- ¹ / ₂ (800)
B	52- ³ / ₈ (1329)	G	6- ¹ / ₈ (155)
C	19- ¹ / ₂ (495)	H	37- ³ / ₄ (983)
D	20- ¹ / ₄ (515)	I	8- ¹ / ₂ (215)
E	21- ¹ / ₄ (540)	J	10 (252)

Legend

- Ⓐ - Electric Connection
- Ⓑ - Heat Pump Hydronic Supply (1 in. NPT Male)
- Ⓒ - Heat Pump Hydronic Return (1 in. NPT Male)

Recommended Minimum Service Clearances

AM2V 020028/034043 Outdoor Unit

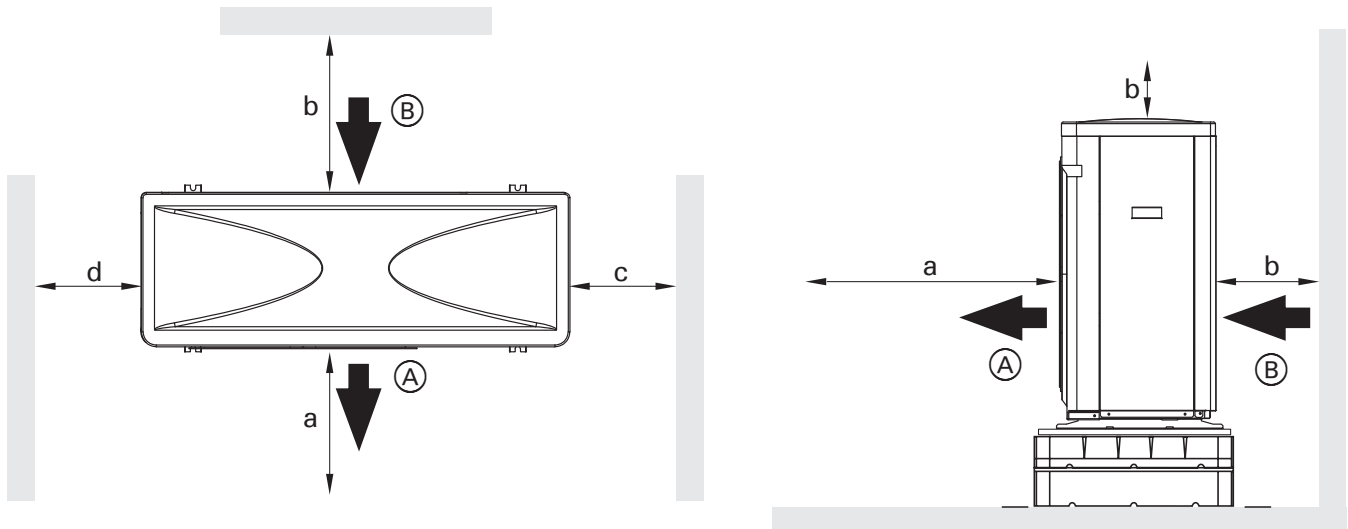

AM2V 020028/034043 Outdoor Unit

Legend


- (A) - Air outlet
- (B) - Air inlet

Dimensions in. (mm)

a	59 (1500)
b	20 (500)
c	39 (1000)
d	20 (500)

Recommended Minimum Service Clearances

AM2V 051078 Outdoor Unit

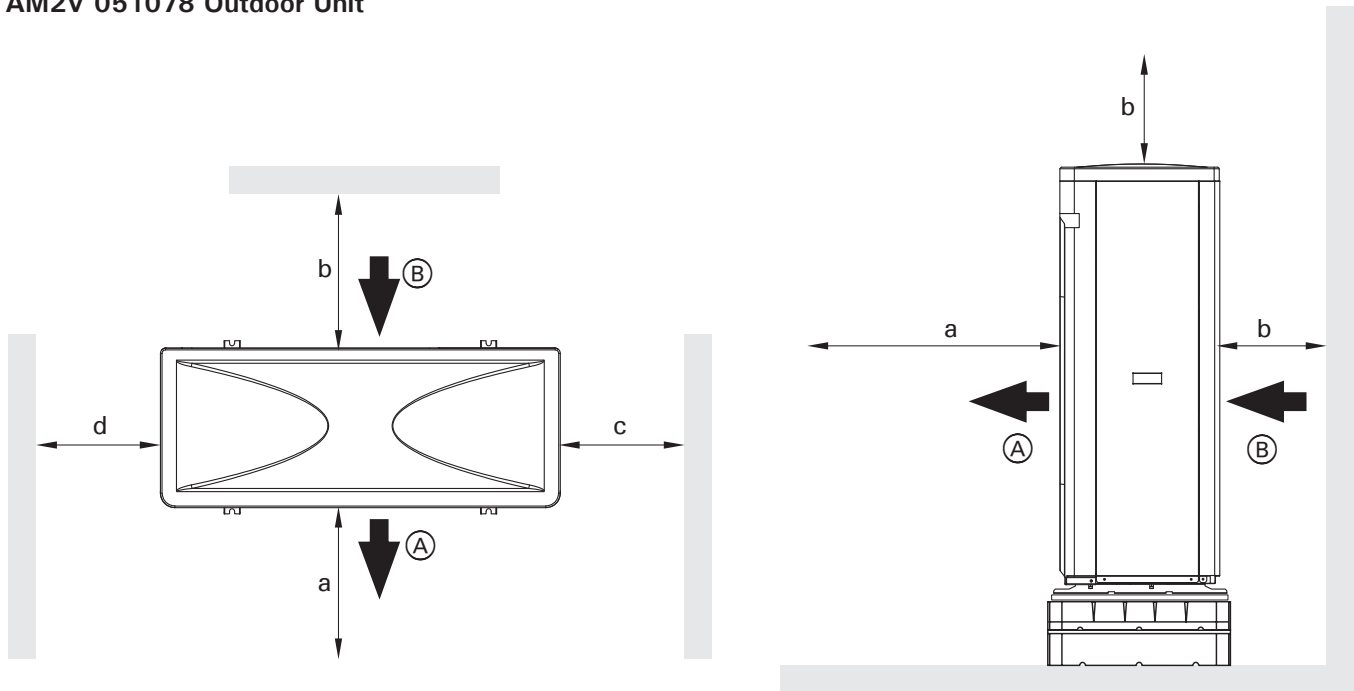

AM2V 051078 Outdoor Unit

Legend


- Ⓐ - Air outlet
- Ⓑ - Air inlet

Dimensions in. (mm)


a	59 (1500)
b	20 (500)
c	39 (1000)
d	20 (500)

Outdoor Unit Sound Pressure


Outdoor Unit	Power level acoustic Lw [dB (A)]	Directivity factor Q	Distance from the noise source r ft (m)									
			3.3 (1)	6.6 (2)	9.8 (3)	13.1 (4)	16.4 (5)	19.7 (6)	26.2 (8)	32.8 (10)	39.4 (12)	49.2 (15)
			Sound pressure level Lp [dB (A)]									
AM2V 020028	60	2	52	46	42	40	38	36	34	32	30	28
		4	55	49	45	43	41	39	37	35	33	32
		8	58	52	48	46	44	42	40	38	36	35
AM2V 034043	63	2	55	49	45	43	41	39	37	35	33	31
		4	58	52	48	46	44	42	40	38	36	35
		8	61	55	51	49	47	45	43	41	39	38
AM2V 051078	64	2	56	50	46	44	42	40	38	36	34	32
		4	59	53	49	47	45	43	41	39	37	36
		8	62	56	52	50	48	46	44	42	40	39

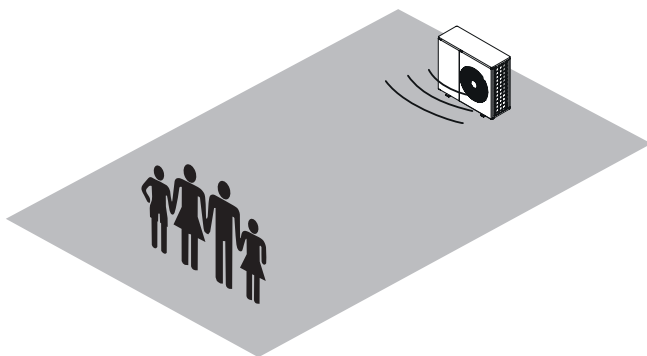

Q = 2: freestanding heat pump on the outside of the building.

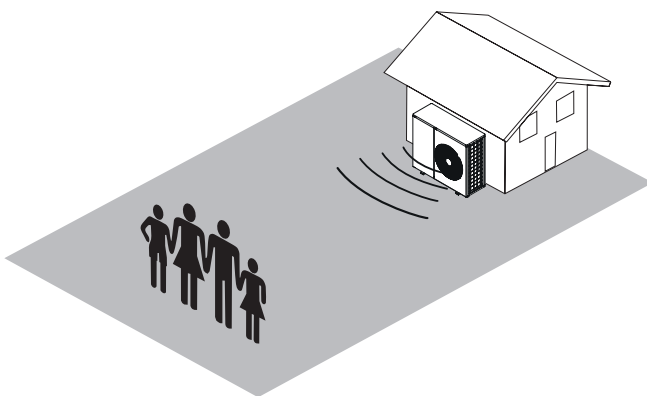

Q = 4: heat pump on the building's wall.

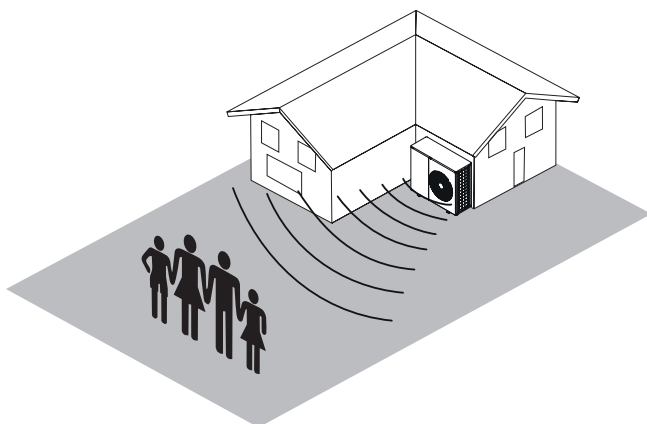

Q = 8: heat pump on the building's wall situated in the corner

Prior to Installation

Mounting:

- Mount the outdoor module in a free-standing position on a fixed supporting structure.
- In areas with snowfall, ensure the outdoor unit has been installed using a snow stand or wall mounting bracket that will elevate the outdoor unit above the anticipated snow load.
- The weight of the outdoor unit must be taken into account.

Setting:

- Do not install the exhaust side upwind.
- Carry out wall ducts and protective conduits for plumbing and electrical connection lines without using bent pipes and without changing the direction of the lines.

Impact of weather conditions:


- When installing in areas exposed to wind, pay attention to wind loads. When the outdoor unit is mounted on a flat roof, significant wind loads may arise depending on the wind load zone and the height of the building. Include the outdoor unit in the lightning protection system.
- When designing rain protection or canopy, pay attention to the heat input (heating mode) and heat output (cooling mode) of the unit.

Condensate:


- Ensure free drainage of the condensate away from the outdoor unit.

Damping of sound and vibration between the building and the outdoor unit:

- Make the hydronic connection to the outdoor unit using flexible connections.
- Electrical cables should be installed without tension.

 **IMPORTANT**


Strong impacts may lead to a damage to the jacketing of the unit. Do not press against the outdoor unit jacketing.

 **IMPORTANT**

Tilting the outdoor module sharply may lead to the oil from the compressor entering the refrigeration circuit and to a consequent failure during the start-up. Maximum tilt angle: 45° for approximately 4 min., otherwise 30°

Placement of the outdoor unit:

- Select a location with good air circulation so that cooled air can flow out and warm air can flow in.
- Do not install in corners, recesses or between walls. This may lead to a recirculation of exhaust air.

 **IMPORTANT**


Restricting the free flow of air may lead to cooled air (or heated in the cooling mode) being drawn back in and lead to disruptions in the operation of the unit, a loss of efficiency and a consequent increase in electrical consumption.

- If set up in an area exposed to strong winds, prevent the wind from affecting the fan area. Strong winds may disrupt the air flow through the evaporator.
- Select the installation location so that the evaporator is not clogged by leaves, snow, etc.
- Consider sound propagation and reflection when selecting the mounting location.

Design guidelines

- Do not mount the device under windows or next to bedroom windows.
- Do not install the device in basement sumps or depressions in the ground.
- Maintain a min. 10 ft. (3 m) distance from basement sumps and windows.
- Maintain a distance from terraces, gutters or surfaces with a protective coating of min. 10 ft. (3 m). At outdoor temperatures below 50°F (10°C), cooled air blown out causes a risk of icing.
- Avoid “short circulating” of air streams with ventilation equipment. Maintain a min. 10 ft. (3 m) distance from the intake area of ventilation units.
- The installation location must be easily accessible, e.g. for service work


Mounting on a Concrete Pad

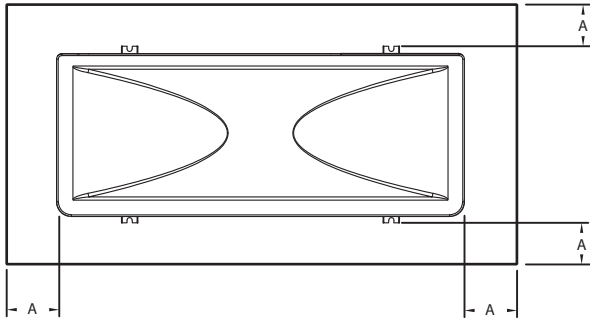

Concrete Pad Mounting


Legend

- Ⓐ - Outdoor Unit
- Ⓑ - Concrete anchor bolt
- Ⓒ - Rubber vibration isolator
- Ⓓ - Concrete pad

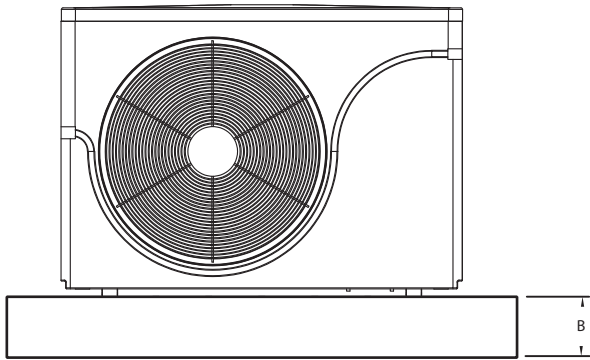


Dimensions in. (mm)

A	2 (50)
B	4 (100)

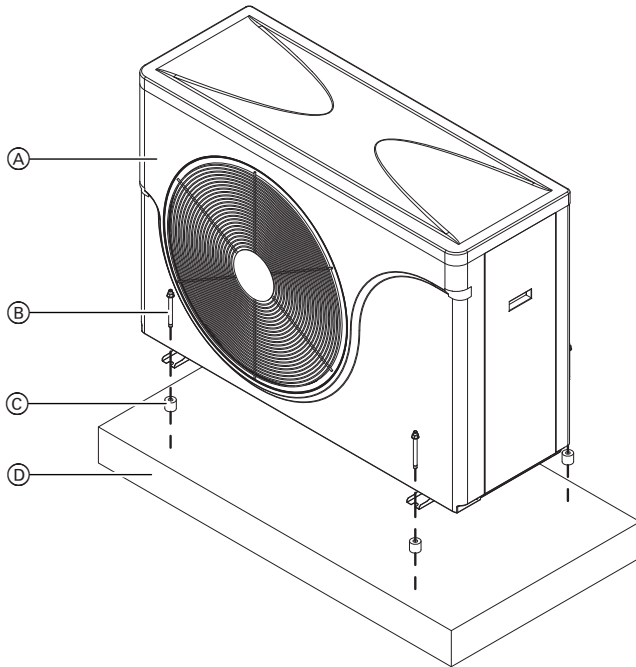

Mounting using a Mounting Curb

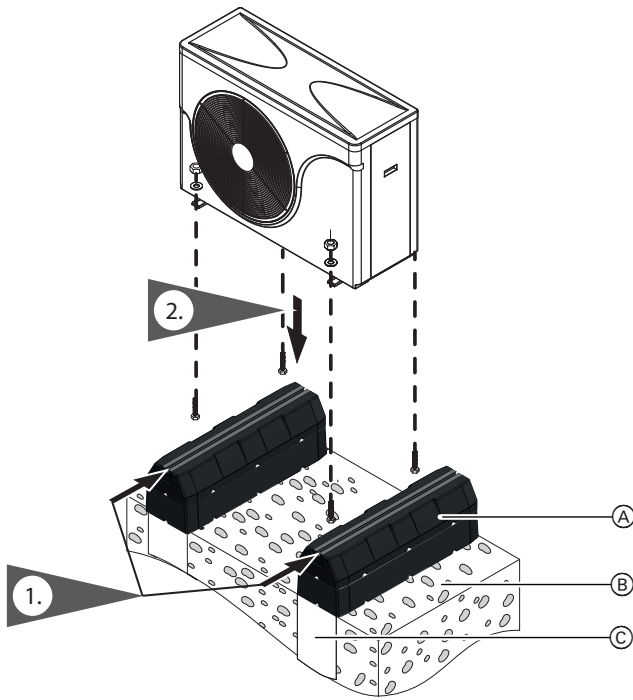


Curb Mounting

Legend

- Ⓐ - Curb mounting bracket
- Ⓑ - Gravel bed to facilitate condensate absorption
- Ⓒ - Concrete foundation (if required)

Mounting on Stand

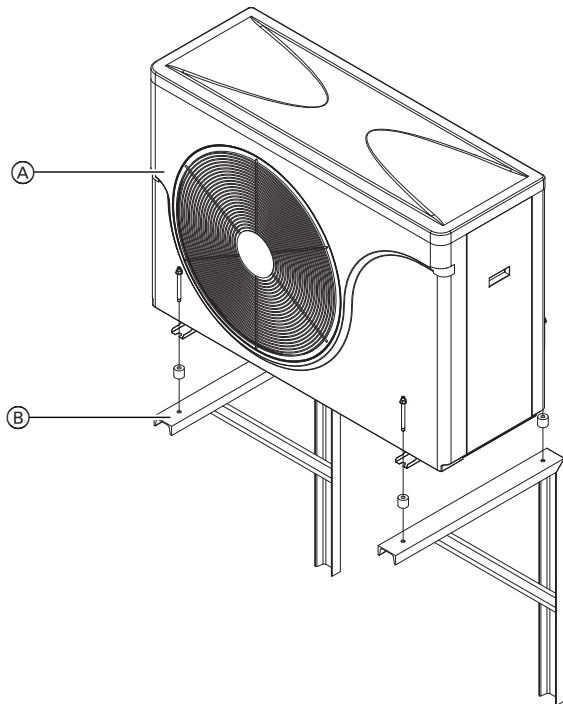

Stand Mounting


Legend

- Ⓐ - Outdoor Unit
- Ⓑ - Mounting Stand




IMPORTANT

Ensure that the stand or wall mount bracket is rated to support the weight of the outdoor unit. Follow the manufacturer's instructions for assembly and mounting requirements.

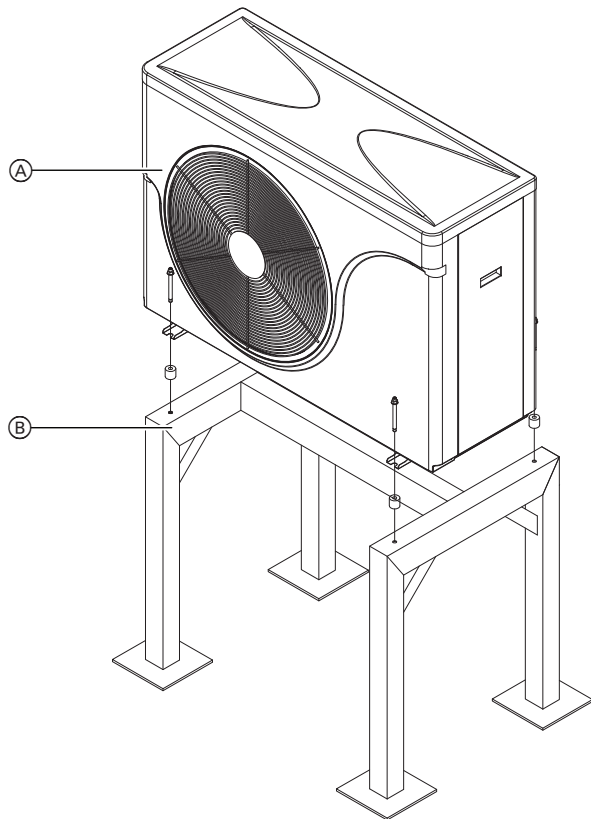

Safety Valve

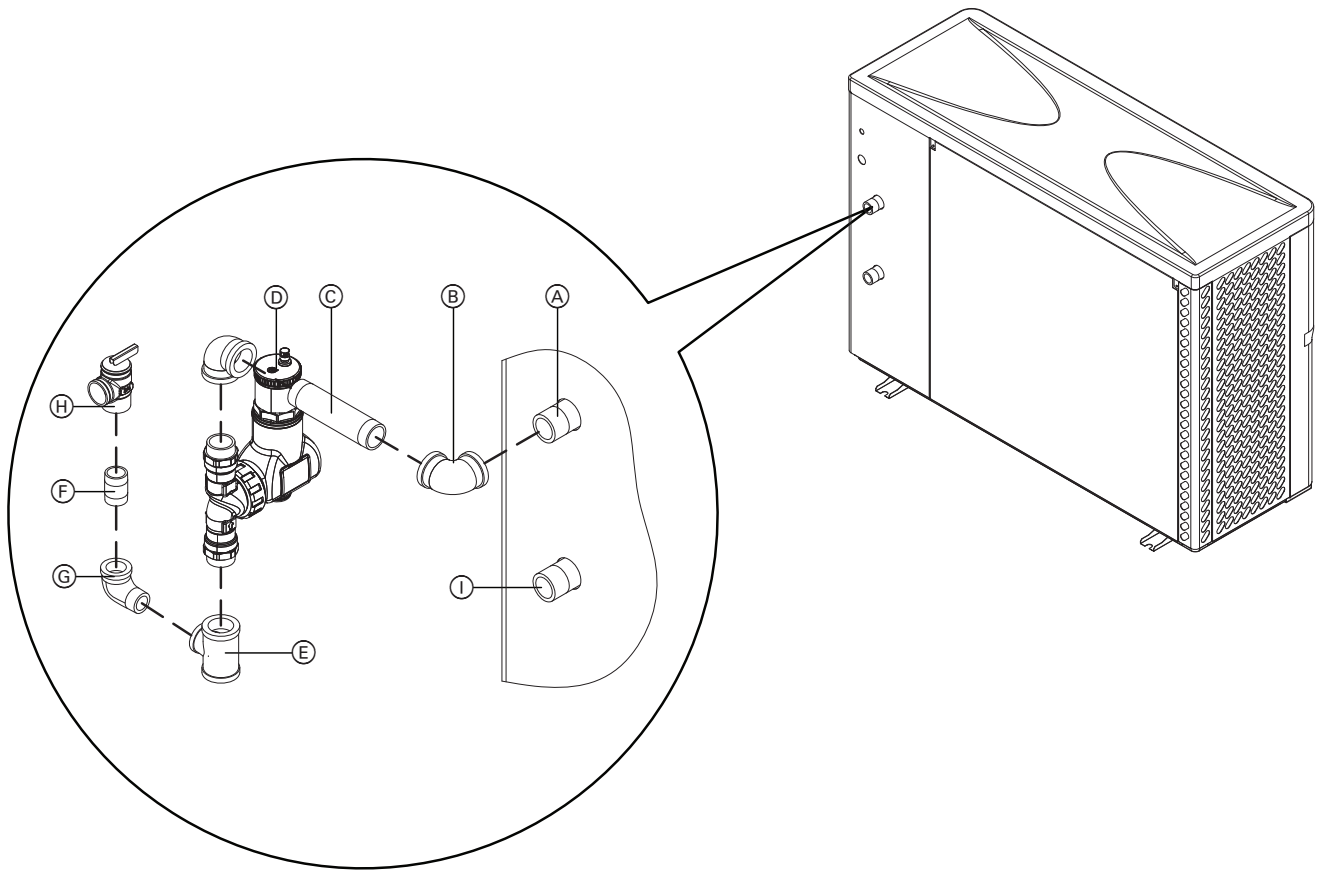

Legend

- (A) Supply from Outdoor Unit
- (B) 1 Inch Brass 90 Degree Elbow
- (C) 1 x 8 Inch Long Brass Nipple
- (D) Microbubble Air Separator
- (E) 1 x 1 x 3/4 Inch Brass Reducing Tee
- (F) 3/4 Inch Brass 90 Degree Street Elbow
- (G) 3/4 Inch Brass Close Nipple
- (H) 30 PSI Pressure Relief Valve
- (I) Return to Outdoor Unit

WARNING
 Do not install an isolation valve between heat pump and pressure relief valve. The discharge pipe for the pressure relief valve must be oriented to prevent scalding of attendants. Pipe pressure relief valve discharge pipe close to floor drain. Never pipe discharge pipe to the outdoors.

IMPORTANT
 Install the (approved) factory supplied pressure relief valve. Removal of air from the system must occur via use of air vent(s) in the system supply. To ensure the heat pump can be purged of all air, ensure supply/return water lines do not contain restrictive piping where air could be trapped.

Installing the pressure relief valve:

1. Use the supplied fittings to install the pressure relief valve on the Supply from Outdoor Unit.


Minimum connection diameters:

Pressure relief valve..... 3/4 in.
 Discharge pipe 3/4 in.
 Maximum operating pressure: 30 PSI (2 bar)
 Minimum operating pressure: 8 PSI (0.5 bar)

Installing the discharge pipe:

1. Install discharge pipe on pressure relief valve in such a way that...
 - the end of the pipe is not threaded.
 - the pressure relief discharge pipe approximately 6 in. (150 mm) above the ground.
- Ensure that...
- there is no shutoff valve installed in the discharge pipe.
 - discharge pipe diameter is not reduced.

Piping Connections

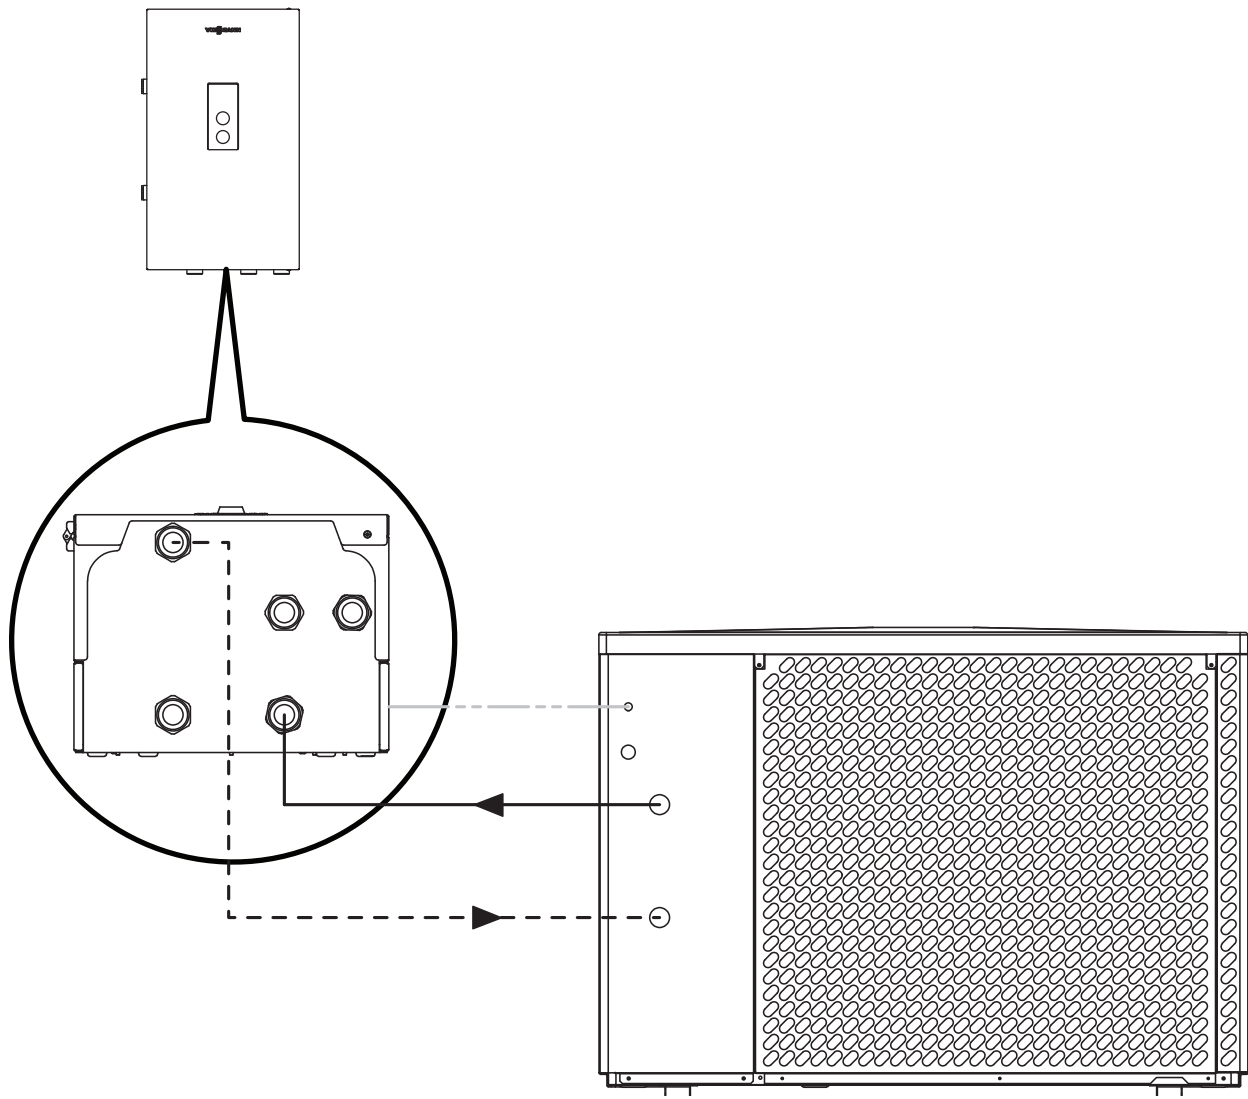

Connection between Indoor and Outdoor Unit

This is a simplified schematic of the connection points between the Indoor Unit and the Outdoor Unit, and does not represent all the required components.

Installation Examples

Connection to the hydronic system

The Vitocal 100-AW AM2V series heat pump can operate in a closed-loop hydronic system (the minimum heating medium pressure is 8 PSI [0.5 bar]). The hydronic installation must be carried out in compliance with the applicable standards. The pipes connecting the heat pump to the indoor unit must have an internal diameter to ensure an adequate flow of the heating medium (see technical data table).

Flexible piping must be used to connect the heat pump to the hydronic system to prevent the transmission of vibrations to the system. The heating medium pipes and connections must be thermally insulated. Do not switch off the unit when the outdoor air temperature is below freezing. This will protect the condenser of the outdoor unit from damage. If there is a risk of power failure, the heat pump heating circuit must be isolated from the hydronic module by means of an additional exchanger and the heat pump heating circuit must be filled with an antifreeze. A prerequisite for the warranty is an installation of a solids separator at the unit inlet.

The hydronic installation must be made in such a way that the indoor unit can be operated in the heating circuit without the outdoor unit (according to the following installation diagrams). This will ensure the operation of the heating system in the event of a failure of the outdoor unit.

Please note that in the following piping layout examples all pumps are field supplied.

WARNING

If a DHW storage tank other than a Viessmann Vitocell tank is used, the installer must verify proper operation of the Viessmann DHW tank temperature sensor with the original manufacturer of the tank. Viessmann strongly recommends the installation of a temperature tempering valve in the DHW supply line.

IMPORTANT

The examples on the following pages depict possible piping layouts of the Vitocal 100-AW heat pump equipped with Viessmann System Technology. For heat pump and tank combinations, please install only feasible combinations listed in the Viessmann Price List. Please note that the following examples are simplified conceptual drawings only! Piping and necessary componentry must be field verified.


IMPORTANT

DHW supply and return piping between heat pump DHW connections and the Viessmann DHW tank connections, shall be a minimum of 1½ in. nominal pipe diameter connection outlet sizes provided on the heat pump and the DHW tank). This will ensure the residual head of the field supplied pump is fully utilized to overcome the resistance of the DHW heat exchanger coil and to provide sufficient water flow to the heat pump heat exchanger. In non-Viessmann DHW tank applications, perform, in addition to the above, accurate calculations for DHW tank coil pressure drop versus heat pump integrated pump residual head to ensure sufficient water flow to the heat pump. Failure to heed the above instructions may cause short-cycling and inadequate DHW supply.

System Example 1

Vitocal 100-AW AM2V with:

- One direct-connected heating circuit
- One heating circuit with a mixing valve
- Combination System Buffer/DHW Storage Tank

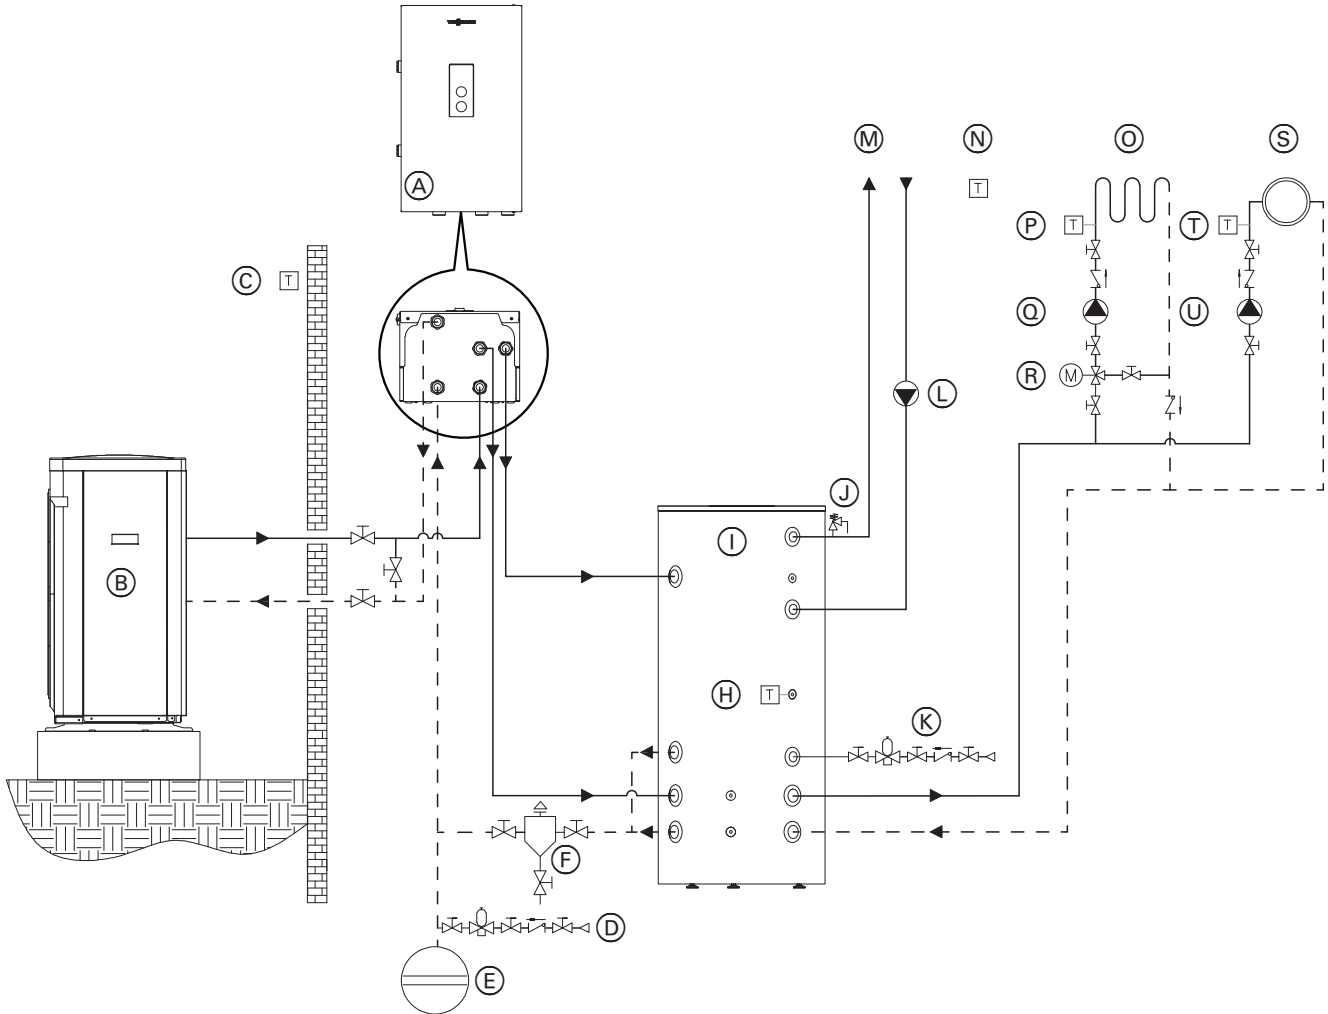

Legend:

- (A) Indoor Unit
- (B) Outdoor Unit
- (C) Outdoor Temperature Sensor
- (D) System Feed
- (E) Expansion Tank
- (F) Wye Strainer
- (G) Moisture Sensor
- (H) DHW Temperature Sensor
- (I) Combination System Buffer/DHW Storage Tank
- (J) Temperature and Pressure Relief Valve
- (K) Potable Water Inlet
- (L) DHW Recirculation Pump
- (M) DHW Outlet
- (N) Room Temperature Sensor
- (O) Low Temperature Heating Circuit

- (P) Heating Circuit Temperature Sensor
- (Q) Heating Circuit Pump
- (R) Heating Circuit Mixing Valve
- (S) High Temperature Heating Circuit
- (T) Heating Circuit Temperature Sensor
- (U) Heating Circuit Pump


⚠ IMPORTANT

System separation is required of underfloor heating systems employing non-oxygen diffusion barrier tubing. All components on the secondary side of the heat exchanger must be made of corrosion-resistant materials.

System Example 2

Vitocal 100-AW AM2V with:

- One direct-connected heating circuit
- One heating circuit with a mixing valve
- System Buffer Tank
- DHW Storage Tank

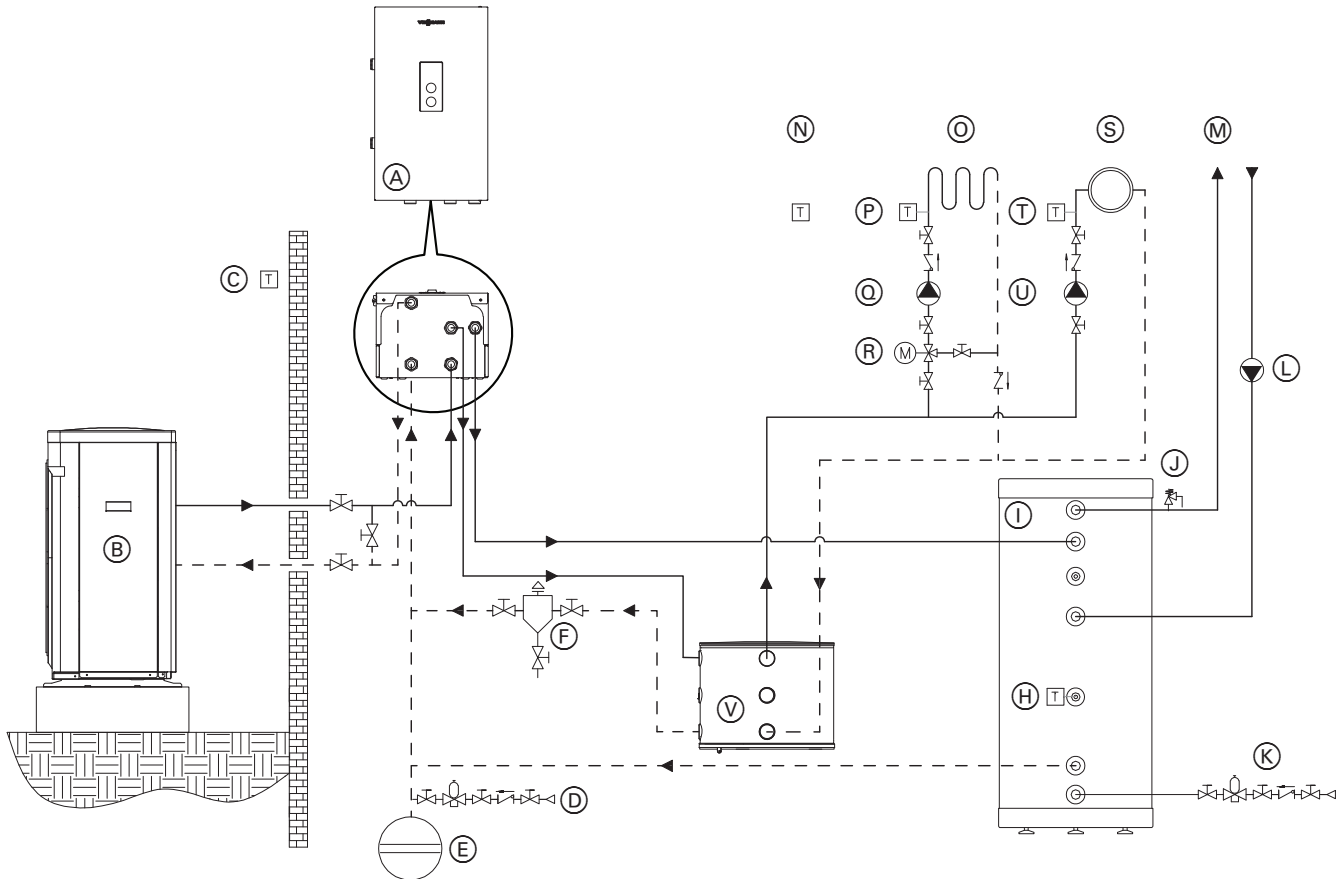

Legend:

- (A) Indoor Unit
- (B) Outdoor Unit
- (C) Outdoor Temperature Sensor
- (D) System Feed
- (E) Expansion Tank
- (F) Wye Strainer
- (G) Moisture Sensor
- (H) DHW Temperature Sensor
- (I) DHW Storage Tank
- (J) Temperature and Pressure Relief Valve
- (K) Potable Water Inlet
- (L) DHW Recirculation Pump
- (M) DHW Outlet
- (N) Room Temperature Sensor
- (O) Low Temperature Heating Circuit

- (P) Heating Circuit Temperature Sensor
- (Q) Heating Circuit Pump
- (R) Heating Circuit Mixing Valve
- (S) High Temperature Heating Circuit
- (T) Heating Circuit Temperature Sensor
- (U) Heating Circuit Pump
- (V) System Buffer Tank


! IMPORTANT

System separation is required of underfloor heating systems employing non-oxygen diffusion barrier tubing. All components on the secondary side of the heat exchanger must be made of corrosion-resistant materials.

System Example 3

Vitocal 100-AW AM2V with:

- One direct-connected heating circuit
- One heating circuit with a mixing valve
- One fan coil
- System Buffer Tank
- DHW Storage Tank

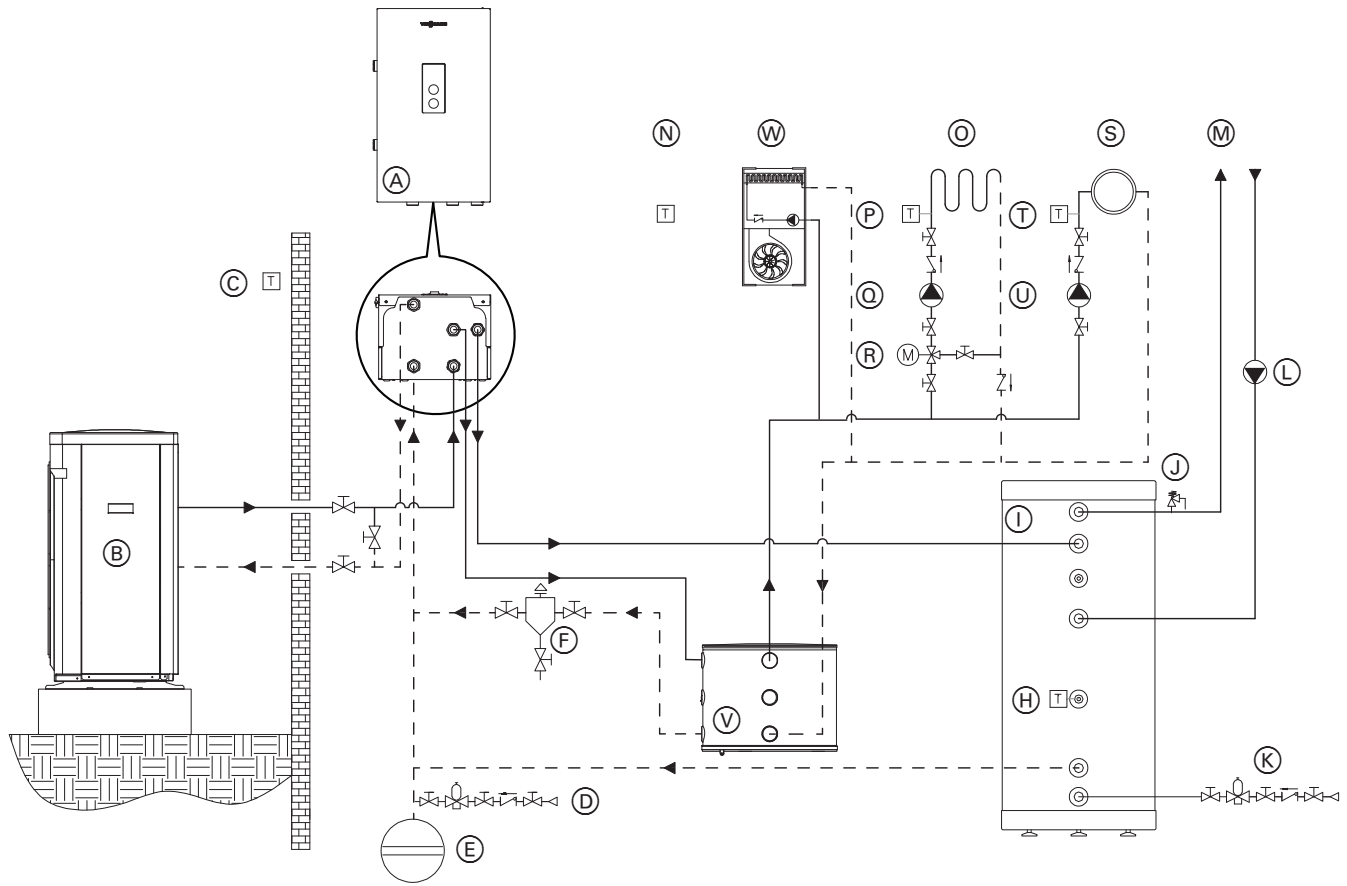


Legend:

- (A) Indoor Unit
- (B) Outdoor Unit
- (C) Outdoor Temperature Sensor
- (D) System Feed
- (E) Expansion Tank
- (F) Wye Strainer
- (G) Moisture Sensor
- (H) DHW Temperature Sensor
- (I) DHW Storage Tank
- (J) Temperature and Pressure Relief Valve
- (K) Potable Water Inlet
- (L) DHW Recirculation Pump
- (M) DHW Outlet
- (N) Room Temperature Sensor
- (O) Low Temperature Heating Circuit

- (P) Heating Circuit Temperature Sensor
- (Q) Heating Circuit Pump
- (R) Heating Circuit Mixing Valve
- (S) High Temperature Heating Circuit
- (T) Heating Circuit Temperature Sensor
- (U) Heating Circuit Pump
- (V) System Buffer Tank
- (W) Fan Coil

⚠ IMPORTANT
 System separation is required of underfloor heating systems employing non-oxygen diffusion barrier tubing. All components on the secondary side of the heat exchanger must be made of corrosion-resistant materials.



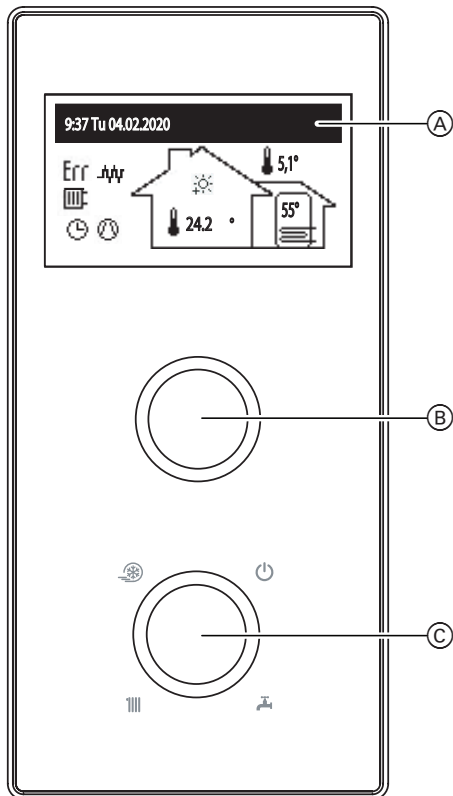


Design and Function



Legend

- Ⓐ - Display
- Ⓑ - Navigation Dial
- Ⓒ - Mode Selector Dial


Use the mode selection dial Ⓒ to set one of the modes:

- Winter (Space heating + DHW)  + 
- Summer (Space Cooling + DHW)  + 
- Standby (Frost Protection Active) 


Turning the navigation dial Ⓑ (left or right), with the winter or summer mode being active, switches the function screens on the display Ⓐ. To select the desired menu item press on the navigation dial Ⓑ.

- Home Screen: indicates the basic parameters of the heat pump (see the table for details),
- Preview of Parameters Menu: allows the input and output signals of the heat pump to be viewed.
- Settings Menu: allows the heat pump parameters to be adjusted to the user's preferences.
- Service/Configuration Menu: allows for heating system configuration to object's conditions (available to the installer and service contractors though an access code) and preview of input and output heat pump's signals and current parameters.
- Party/Holiday/Manual Menu: Allows the homeowner to override the active heating/cooling function without needing to adjust the time schedule

Pressing and holding the navigation dial when in any menu will return you to the home screen.

The individual functions are accessed by selecting the relevant menu screen and pressing the navigation dial. If an error or warning in the system occurs, the home screen will display either a **Err** or . By pressing on dial Ⓑ, a list of detected errors and warnings will be displayed.

Design and Function

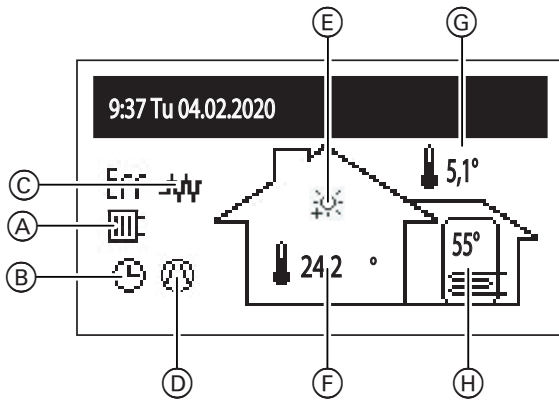

Legend

- (A) - Signalling of heat take-up
- (B) - Heating Program 'ON' Indication
- (C) - Heater 'ON' Indication
- (D) - Compressor Operation Indicator
- (E) - Set Room Temperature
- (F) - Actual Room Temperature
- (G) - Outdoor Temperature
- (H) - DHW Tank Temperature

Indication of the running program

	According to a pre-set daily/weekly schedule
	Disinfection of the storage tank
	Defrost cycle running
	PARTY - maintaining a comfortable temperature in the room and the cylinder
	HOLIDAYS - maintaining an economic or frost-free temperature in the room and the storage tank
	Implementation of the frost protection program
	MANUAL - maintaining the desired temperature in the room

Indication of realized Room Temperature

	Signalling of heat take-up > central heating
	Signalling of heat take-up > hot tap water
	Cooling operation indication

Other Symbols

	Error indication
	Warning indication
	Electric heat element is active
	Indicates that the compressor is active. Flashing symbol indicates bivalent mode.
	Back-up Heating On

Design and Function



Setting the Heating Curve Slope

The purpose of the heat pump controller is to maintain the temperature in the central heating system depending on the outdoor temperature. When the temperature outside the building is low, the need for heat is greater, whereas if the temperature outdoors is high, there is no need to maintain a high temperature in the system. The relationship between the outdoor temperature and the temperature of the central heating system can be represented in the form of a graph, the so-called


heating curve. The figure shows a family of heating curves for a room temperature set point of 72°F (22°C). Depending on the characteristics of the building, the climate zone and the heating system type, a suitable curve needs to be selected.

Setting the Heating Curve Shift

If the curve needs to be shifted, change the [curve shift] parameter. The figure shows as an example curve no. 8 with a shift of -14°F and 50°F (-10°C and 10°C).

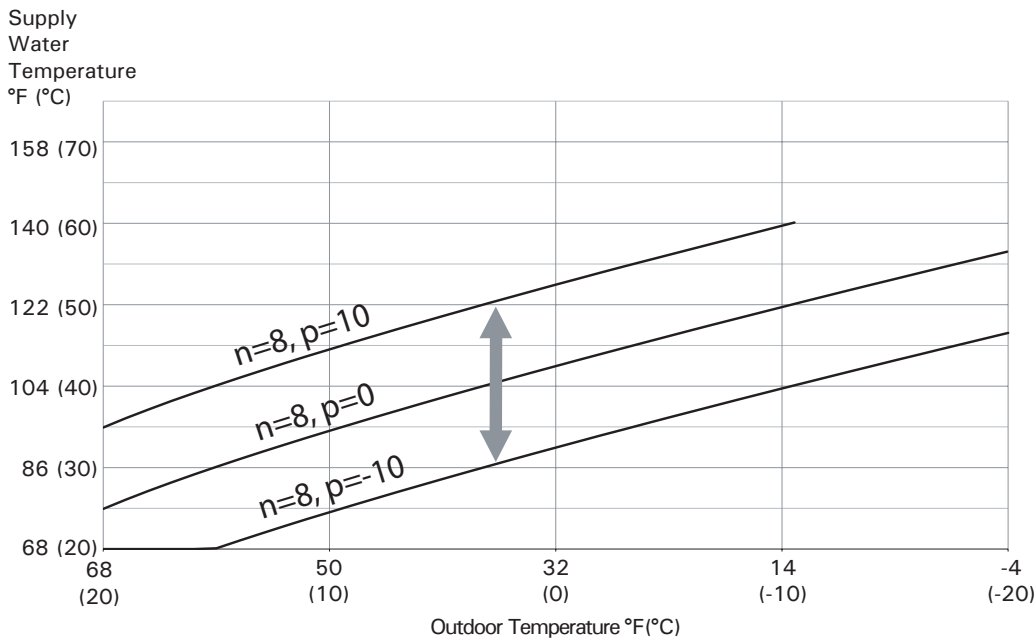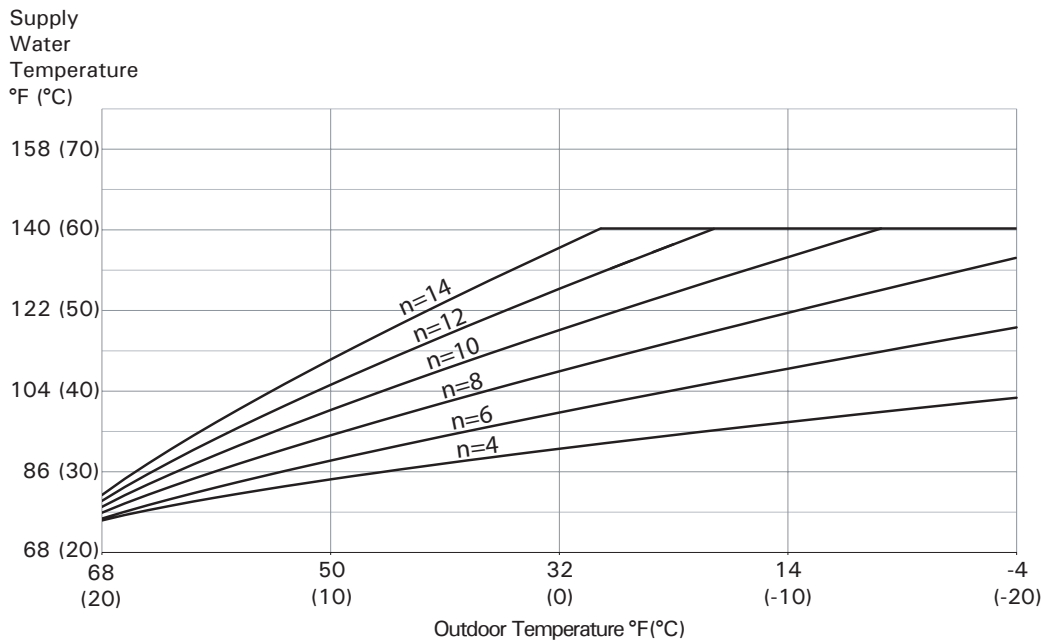


Accessories - Supplied

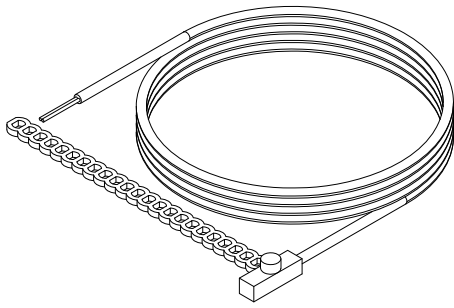


Strap-on Temperature Sensor

- Cable length approx. 16 ft. (4.8 m), ready to connect
- 10K ohms @ 77°F (25°C)
- at operation: 32 to 212°F (0 to 100°C) application in living areas and installation sites (normal ambient conditions)
- storage & shipping: -4 to 149°F (-20 to 65°C)

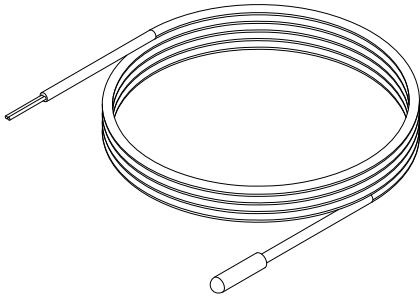


Immersion Temperature Sensor

- Cable length approx. 16 ft. (4.8 m), ready to connect
- 10K ohms @ 77°F (25°C)
- at operation: 32 to 212°F (0 to 100°C) application in living areas and installation sites (normal ambient conditions)
- storage & shipping: -4 to 149°F (-20 to 65°C)

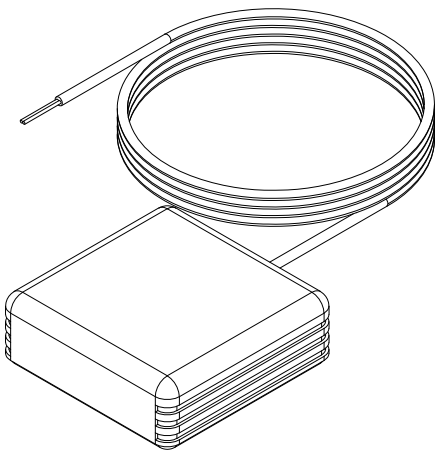

Room Temperature Sensor



- Cable length approx. 16 ft. (4.8 m), ready to connect
- 10K ohms @ 77°F (25°C)
- at operation: 32 to 212°F (0 to 100°C) application in living areas and installation sites (normal ambient conditions)
- storage & shipping: -4 to 149°F (-20 to 65°C)

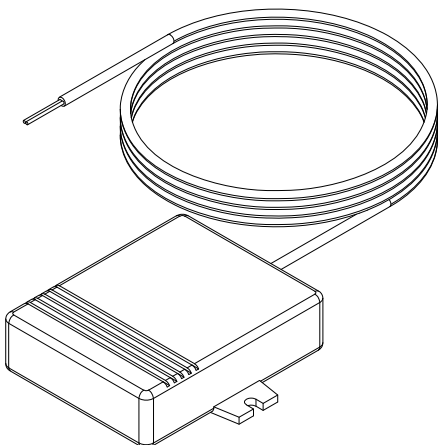

Outdoor Temperature Sensor

- Cable length approx. 16 ft. (4.8 m), ready to connect
- 10K ohms @ 77°F (25°C)
- at operation: -40 to 212°F (-40 to 100°C) application in living areas and installation sites (normal ambient conditions)
- storage & shipping: -4 to 149°F (-20 to 65°C)

Accessories - Optional

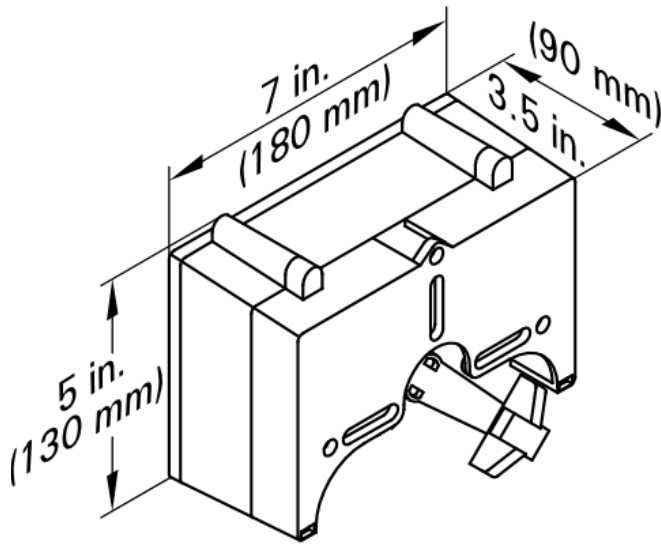

Viessmann Mixing Valve Motor Kit

The mixing valve actuator is mounted directly on the Viessmann 3/4 to 2 in. mixing valve.

The mixing valve actuator is a motor-driven control unit.

The rotational direction is reversible.

The mixing valve actuator comes with a supply temperature sensor (strap-on sensor with 7 ft. (2.1 m) connecting cable).

Rated voltage: 120VAC
 Rated frequency: 60 Hz
 Power consumption: 5W

Actuator maximum ambient temperature


- at operation: 32 to 104°F (0 to 40°C) application in living areas and installation sites (normal ambient conditions)
- storage & shipping: -4 to 149°F (-20 to 65°C)

Sensor maximum ambient temperature

- at operation: 32 to 212°F (0 to 100°C) application in living areas and installation sites (normal ambient conditions)
- storage & shipping: -4 to 149°F (-20 to 65°C)

Indoor Unit Wiring Diagram

AM2V 020028/034043 Indoor Unit

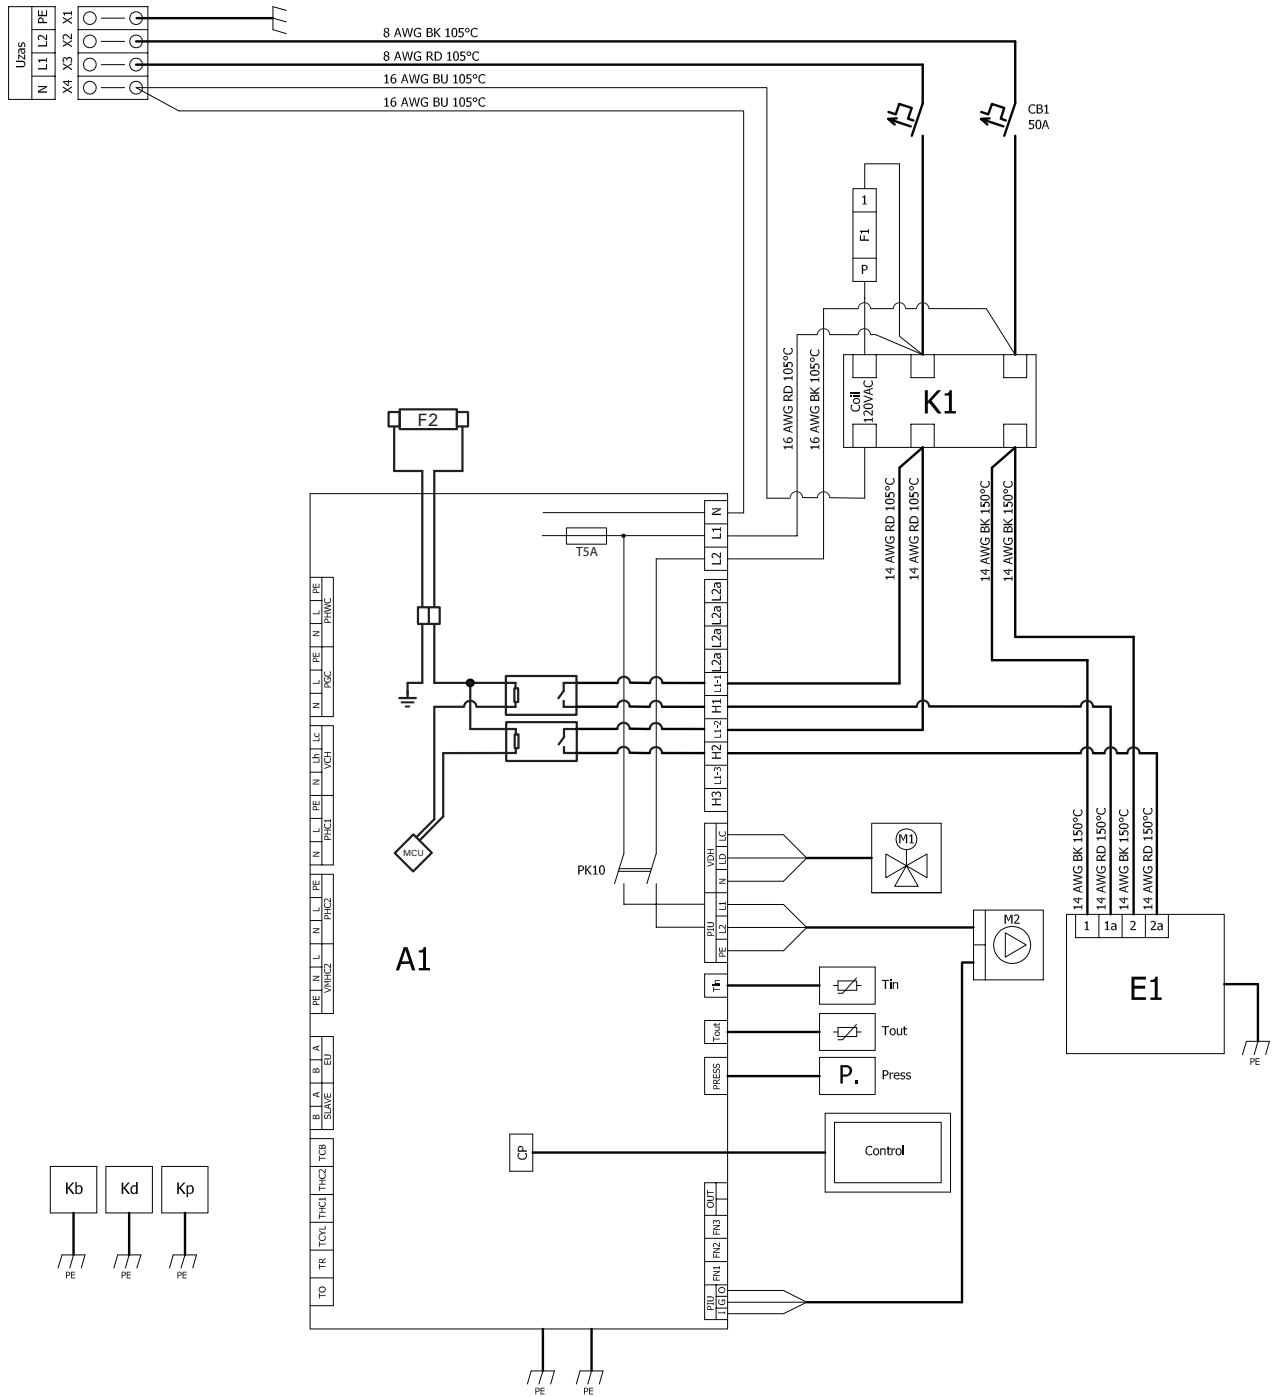


Legend

- E1 - Heat Exchanger
- A1 - Main Board
- CP - Control Panel
- F1 - Fixed High Limit
- F2 - Automatic Reset High Limit
- CB1 - Circuit Breaker

- K1 - Contactor
- M1 - Internal Diverting Valve
- M2 - Internal Circulation Pump
- Tin - Return Temperature Sensor
- Tout - Flow Sensor
- P - Pressure Sensor

Indoor Unit Wiring Diagram

AM2V 051078 Outdoor Unit

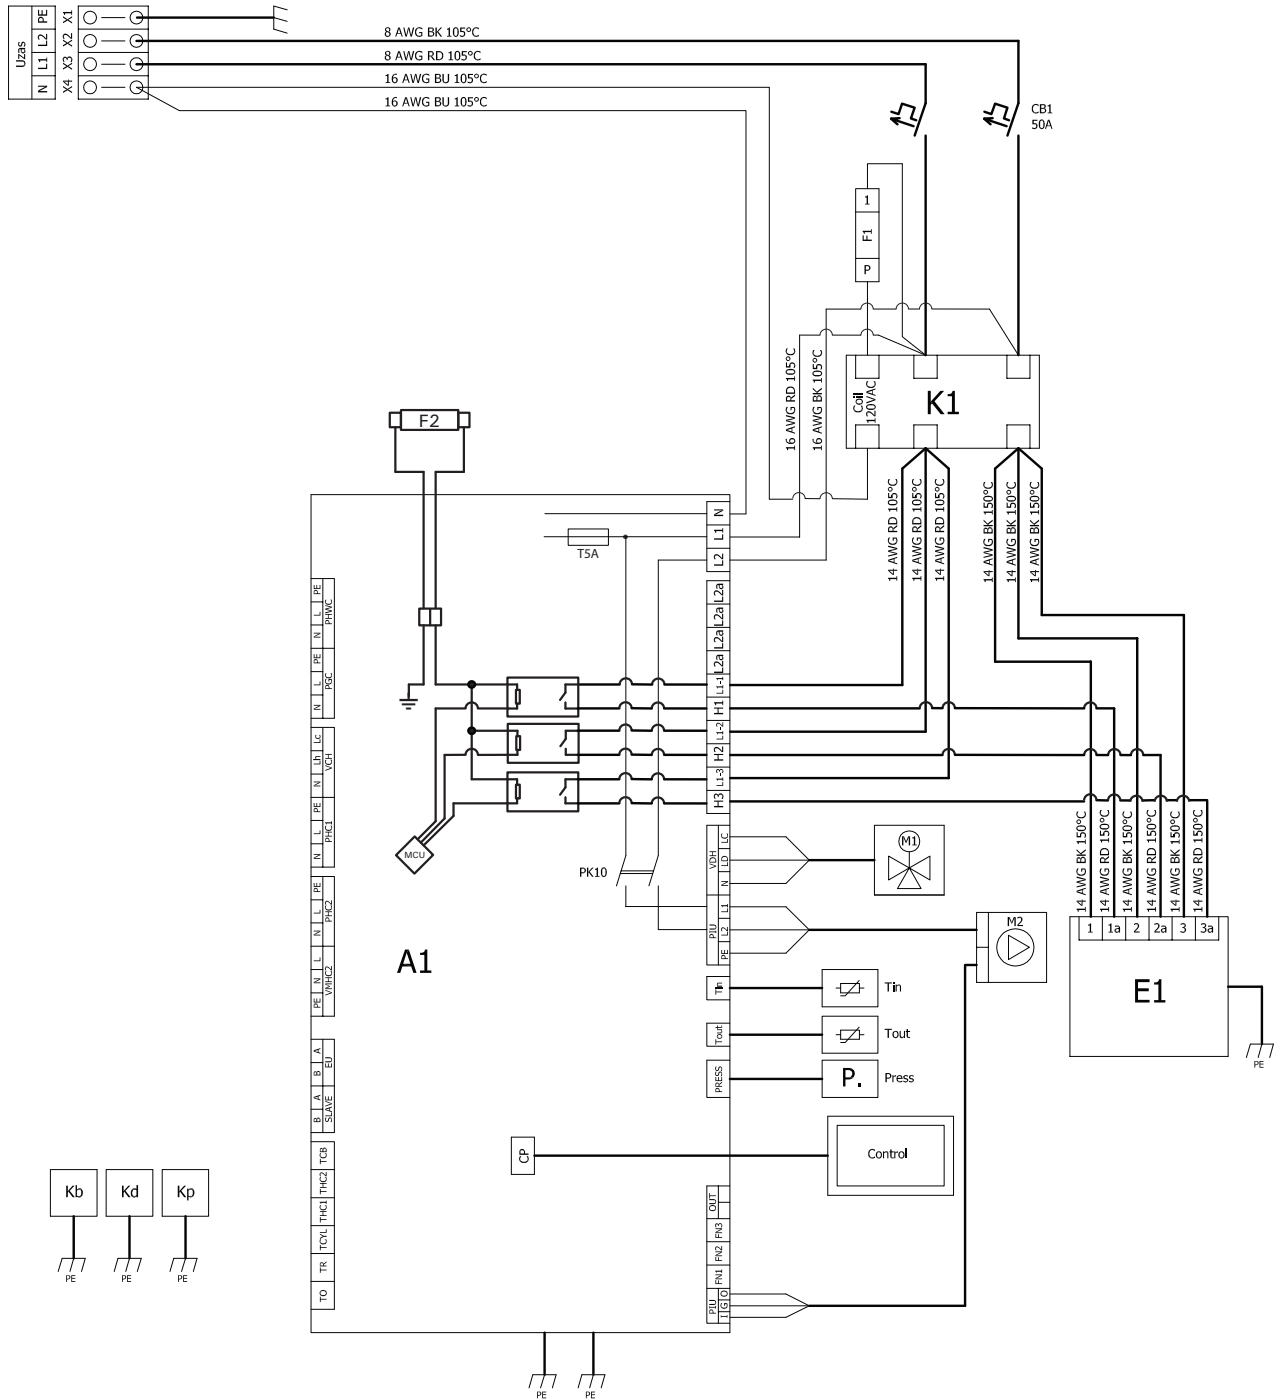


Legend

- E1 - Heat Exchanger
- A1 - Main Board
- CP - Control Panel
- F1 - Fixed High Limit
- F2 - Automatic Reset High Limit
- CB1 - Circuit Breaker
- K1 - Contactor
- M1 - Internal Diverting Valve
- M2 - Internal Circulation Pump
- Tin - Return Temperature Sensor
- Tout - Flow Sensor
- P - Pressure Sensor

Outdoor Unit Wiring Diagram

AM2V 020028 Outdoor Unit

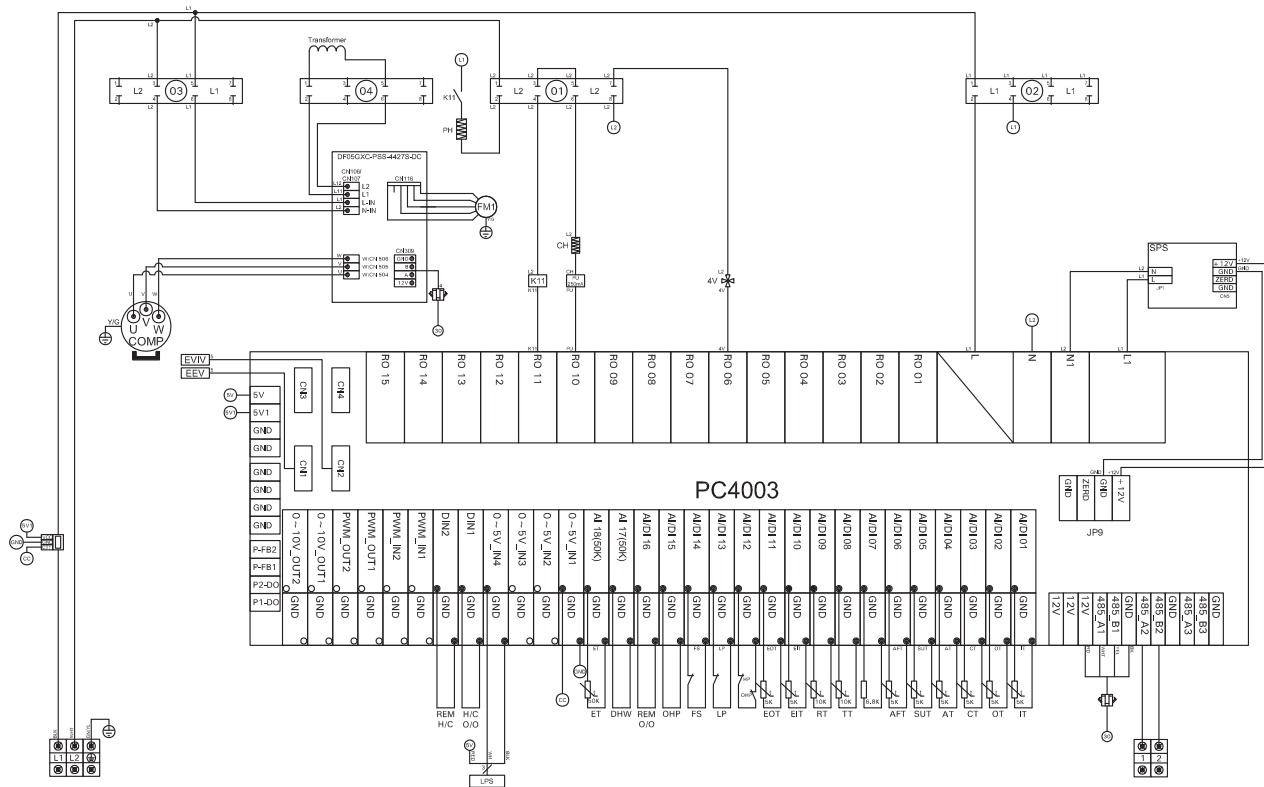


Designation	Description
AFT	Anti-freeze Temperature
AT	Ambient Temperature
COMP	Compressor
CT	Coil Temperature
CH	Cabinet Heater
EIT	EVI Inlet Gas Temperature
EOT	EVI Outlet Gas Temperature
EEV	Electronic Expansion Valve
EVIV	Electronic Expansion Valve for EVI
ET	Exhaust Temperature
FM	Fan Motor
FS	Flow Switch
HP	High Pressure Protection
IT	Inlet Water Temperature
K4	Relay of Circulation Pump
K5	Relay of Hot Water Pump
K9	Relay of 3-Way Valve
K11	Relay of Pan Heater

Designation	Description
LP	Low Pressure Protection
LPS	Low Pressure Sensor
OT	Outlet Water Temperature
OHP	Overheat Protection
PH	Pan Heater
RT	Room Temperature
SUT	Suction Temperature
SPS	Switching Power Supply
4V	4-Way Valve
TT	Tank Temperature

Outdoor Unit Wiring Diagram

AM2V 034043 Outdoor Unit

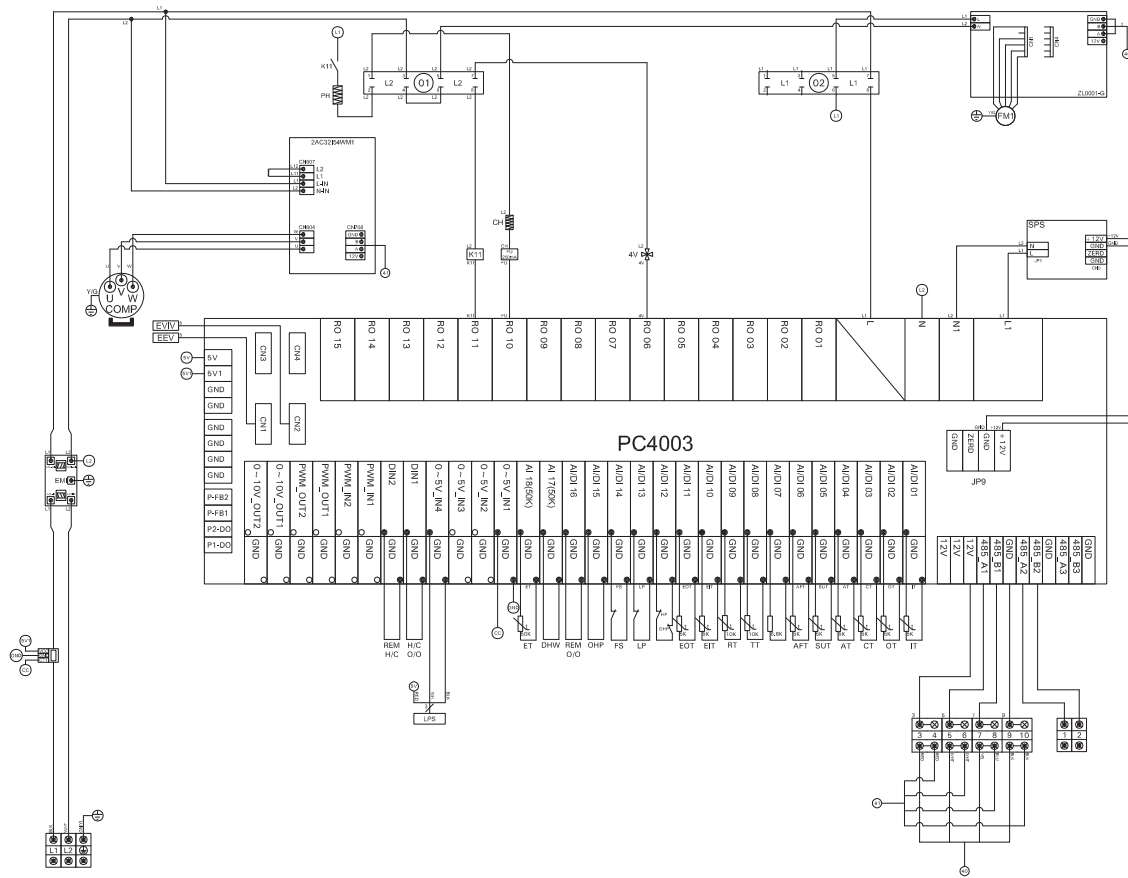

Designation	Description
AFT	Anti-freeze Temperature
AT	Ambient Temperature
COMP	Compressor
CT	Coil Temperature
CH	Cabinet Heater
EIT	EVI Inlet Gas Temperature
EOT	EVI Outlet Gas Temperature
EEV	Electronic Expansion Valve
EVIV	Electronic Expansion Valve for EVI
ET	Exhaust Temperature
FM	Fan Motor
FS	Flow Switch
HP	High Pressure Protection
IT	Inlet Water Temperature
K4	Relay of Circulation Pump
K5	Relay of Hot Water Pump
K9	Relay of 3-Way Valve
K11	Relay of Pan Heater

Designation	Description
LP	Low Pressure Protection
LPS	Low Pressure Sensor
OT	Outlet Water Temperature
OHP	Overheat Protection
PH	Pan Heater
RT	Room Temperature
SUT	Suction Temperature
SPS	Switching Power Supply
4V	4-Way Valve
TT	Tank Temperature

Filling the System

Water quality

Treatment for Vitocal feed water should be considered in areas of known problems, such as where a high mineral content and hardness exist.

In areas where freezing might occur, an antifreeze may be added to the system water to protect the system. Please adhere to the specifications given by the antifreeze manufacturer.

Do not use automotive silicate based antifreeze. Please observe that an antifreeze/water mixture may require a backflow preventer within the automatic water feed and influence components such as diaphragm expansion tanks, radiation, etc. Maximum antifreeze content is 50% for the Vitocal 100-AW.

Do not use sulphur-containing Vitocal feed water. Check pH-level after some operating time. It should be in the range from 8.2 to 9.5. If it is not, please take appropriate measures. Total permissible hardness of the fill and top-up water - 70 ppm.

Do not use antifreeze other than specifically made for hot water heating systems. System also may contain components which might be negatively affected by antifreeze. Check total system frequently when filled with antifreeze. Advise system operator/ultimate owner that system is filled with a glycol mix. The heating contractor must provide a SDS (Safety Data Sheet) for the antifreeze used to the system operator/ultimate owner.



Viessmann Manufacturing Company (U.S.) Inc.
 45 Access Road
 Warwick, Rhode Island · 02886 · USA
 TechInfo Line 1-888-484-8643
 1-800-288-0667 · Fax (401) 732-0590
 www.viessmann-us.com · info@viessmann-us.com

Viessmann Manufacturing Company Inc.
 750 McMurray Road
 Waterloo, Ontario · N2V 2G5 · Canada
 TechInfo Line 1-888-484-8643
 1-800-387-7373 · Fax (519) 885-0887
 www.viessmann.ca · info@viessmann.ca

