

Gas Condensing Technology
VITOCROSSAL® 300, CU3A

VIESSMANN



Gas Condensing Technology



Featuring a folding Vitotronic 200 HO1B boiler and system control.



Industry-leading Viessmann made Titanium-infused stainless steel Inox-Crossal heat exchanger.



ViCare App — Comfort at a glance. Program your boiler for ideal temperature and maximum cost savings.



The ViCare App is free on all iOS and Android operating systems.

Vitocrossal 300, CU3A 19-199 MBH

POWERFULLY SIMPLE. The Vitocrossal 300, CU3A gas-condensing, floor standing boiler is a testament to the power of a simple solution. With best-in-class, Viessmann-made components and no primary/secondary piping or low-loss headers required, the CU3A is the perfect choice for residential and light commercial applications – including high temperature heating, cast-iron boiler replacements and multi-zone systems.

Simply ideal for new construction and retrofits.

With its compact design, the Vitocrossal 300 CU3A is simple, fast and easy to install. To replace an old cast-iron sectional boiler, the CU3A is the ideal “drop-in” replacement with simple connection. All the existing system piping can remain intact. For new installations, the CU3A alleviates the need for costly piping arrangements. Flue venting is also simplified with the exhaust and intake air connections located at the bottom of the boiler, only 11.5” off the ground, allowing easy alignment of the venting system to existing chimney connector.

Advanced condensing technology

Constructed with titanium stabilized stainless steel, the Inox-Crossal heat exchanger provides the ideal conditions for the utilization of the condensate in the hidden heat of the flue gas. The smooth combustion chamber surface and the vertically arranged heat exchanger drain the accumulating condensate and create a permanent self-cleaning effect, which maintains efficiencies up to 98% (95% AFUE), ensures prolonged service life, and reduces maintenance.

Wide water passageways

Large water content is contained within the pocket design of the heat exchanger. This allows for simplified system piping with full system flow, eliminating the need for a dedicated boiler pump or primary/secondary piping.

ViCare - the best connection between you and your Viessmann boiler

The ViCare App makes controlling your boiler easy and intuitive. The heating schedule wizard quickly adapts the boiler operation to your lifestyle. You can immediately see your potential energy savings on a summary page. The ViCare App also alerts you to changes in heating status so you can quickly reprogram your boiler or contact your heating contractor for assistance.


Intelligent combustion control

The proven Matrix dome burner with Lambda Pro combustion control automatically adjusts to fluctuating gas qualities and ensures a consistently high combustion efficiency for both natural gas and propane.

Simple and powerful Vitotronic control

Installing contractors and end users benefit equally from the easy-to-use, flexible Vitotronic 200 KW6B boiler and system control that manages the entire heating system with maximum comfort, precise temperature settings and cost-effective fuel savings. The control menu is logical, intuitive and easy to set up. Features include control of up to 3 heating circuits, intelligent DHW control, a variable speed pump output (0-10V), and multiple setback timers. The graphic user interface will display system parameters and solar yield (if integrated with a Viessmann solar system).



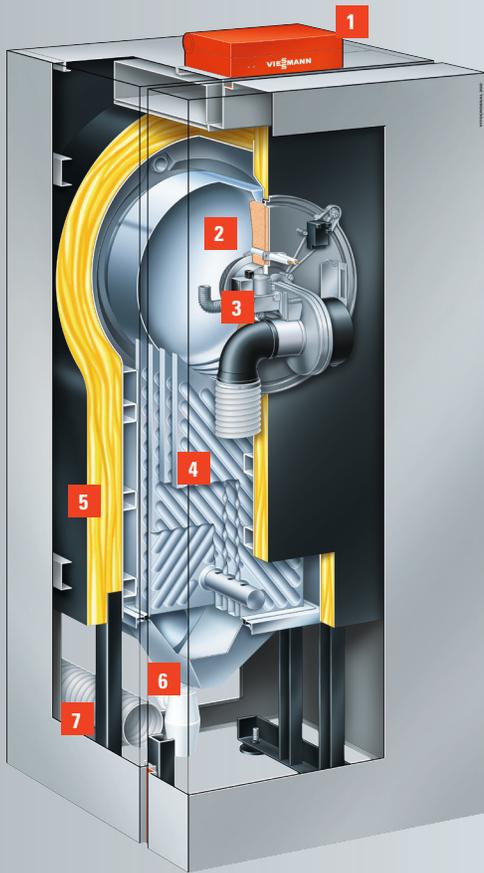


- 1 Vitotronic 200 HO1B boiler and system control
- 2 Water-cooled stainless steel combustion chamber
- 3 Modulating MatriX dome burner
- 4 Stainless steel Inox-Crossal heat exchanger
- 5 Highly effective thermal insulation
- 6 Flue gas collector with condensate drain pipe
- 7 Combustion air inlet connection

Vitocrossal 300, CU3A (Actual product may vary from illustrated product image)

Benefits at a glance

- Multi-boiler installation with 8 boilers up to 1592 MBH
- High efficiency of 95% AFUE on all models
- No dedicated boiler pump required
- Eliminates primary/secondary piping
- MatriX dome burner with 5:1 turndown ratio ensures high efficiency and extremely clean combustion
- High water volume extends burner run time and reduces cycling
- Self-calibrating Lambda Pro combustion management system offers simple commissioning with no field adjustments
- Easy conversion from natural gas to liquid propane with no orifice change
- Inox-Crossal stainless steel heat exchanger and high mass design provide durability, reliability, and long service life
- Multiple venting options and configurations with vent lengths up to 198 ft
- 5-year limited parts warranty for greater piece of mind
- Remote monitoring and control through the ViCare app (when you connect to WiFi using the included Vitoconnect).

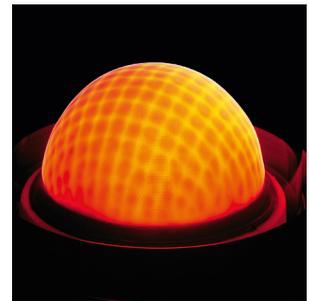

The MatriX dome burner for exceptionally low-emission combustion; a milestone in heating technology.




The Vitocrossal 300, CU3A is ENERGY STAR® qualified. By choosing the Vitocrossal 300, CU3A, you are helping to promote cleaner air and a healthier environment.

Technical Data



Vitocrossal 300 CU3A gas-fired condensing boiler

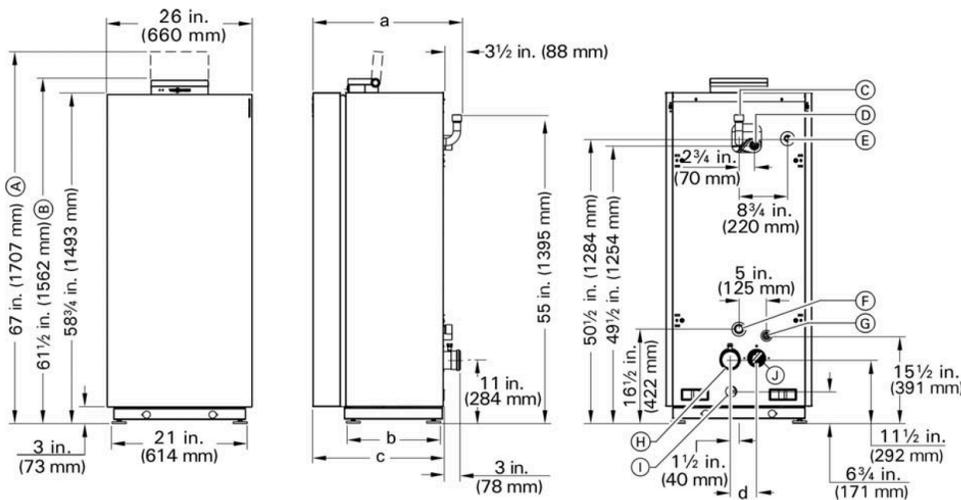

Legend


- A** Overall boiler height (boiler control open)
- B** Overall boiler height (boiler control closed)
- C** Safety header connection
- D** Boiler supply
- E** Gas connection
- F** Boiler return
- G** Boiler drain
- H** Vent connection
- I** Condensate drain connection
- J** Combustion air connection

Model (kW, BTU/h)		94	125	160	199
Overall Height (control open)	Inches	67	67	67	67
Overall Height (control closed)	Inches	61.5	61.5	61.5	61.5
Safety Header Connection	Inches	55	55	55	55
Boiler Supply[†]	Inches	49.5	49.5	49.5	49.5
Maximum Input (NG)	MBH	94	125	160	199
Minimum Input (NG)	MBH	19	25	43	43
Net AHRI Rating	MBH	76	101	129	161
AFUE	%	95	95	95	95
Weight	lbs.	269	275	352	352
Boiler Water Content	USG	13.5	13	18.8	18.8
Heat Exchanger Surface	ft. ²	16.7	20.7	34.1	34.1
Maximum Operating Pressure	psig	30	30	30	30
Minimum Gas Supply Pressure					
Naturel Gas (NG)	"w.c.	4	4	4	4
Liquid Propane Gas (LPG)	"w.c.	10	10	10	10
Boiler Water Maximum Temperature					
Adjustable high limit (AHL) range space heating (steady state)		68°F - 194°F	68°F - 194°F	68°F - 194°F	68°F - 194°F
Boiler Connections					
Gas Valve Connection	NPTM	3/4	3/4	3/4	3/4
Boiler Heating Supply And Return	NPTM	1 1/4	1 1/4	1 1/4	1 1/4
Boiler Flue Gas Connection	Ø Inches	3*	3*	4**	4**
Combustion Air Supply Connection	Ø Inches	3*	3*	3*	3*

[†]All height dimensions of the boiler have a tolerance of +0.6in. (+15mm) due to the factory installed adjustable feet.

* Sized for CentroTherm and Duravent. **Sized for Duravent.

For the latest technical data, visit us online at www.viessmann-us.com



Viessmann Manufacturing Company (U.S.) Inc.
Warwick, RI 02886 U.S.A.
1-800-288-0667
www.viessmann-us.com